

## Solutions to Chapter 8 Exercises (Part 2)

### Problem 8.8

Define  $X(t)$  and  $Y(t)$  according to:

$$\begin{aligned}X(t) &= A(t) \cos(t), \\Y(t) &= B(t) \sin(t), \\ \mu_A(t) &= \mu_B(t) = 0, \\ R_{A,A}(\tau) &= R_{B,B}(\tau) = R(\tau), \\ R_{A,B}(\tau) &= 0.\end{aligned}$$

Then,

$$\begin{aligned}E[X(t)] &= 0. \\E[Y(t)] &= 0. \\R_{X,X}(t_1, t_2) &= E[A(t_1)A(t_2) \cos(t_1) \cos(t_2)] \\ &= R(t_2 - t_1) \cos(t_1) \cos(t_2) \\R_{Y,Y}(t_1, t_2) &= E[B(t_1)B(t_2) \sin(t_1) \sin(t_2)] \\ &= R(t_2 - t_1) \sin(t_1) \sin(t_2) \\R_{Z,Z}(t_1, t_2) &= E[(X(t_1) + Y(t_1))(X(t_2) + Y(t_2))] \\ &= R_{X,X}(t_1, t_2) + R_{Y,Y}(t_1, t_2) + R_{X,Y}(t_1, t_2) + R_{Y,X}(t_1, t_2) \\ &= R(t_2 - t_1)[\cos(t_1) \cos(t_2) + \sin(t_1) \sin(t_2)] \quad (\text{since } R_{X,Y}(\tau) = R_{Y,X}(\tau) = 0) \\ &= R(t_2 - t_1) \cos(t_2 - t_1).\end{aligned}$$

Therefore, for this example,  $Z(t) = X(t) + Y(t)$  is WSS, while  $X(t)$  and  $Y(t)$  are not WSS.

### Problem 8.9

$$\begin{aligned}
 X(t) &= A(t) \cos(\omega_0 t + \Theta) \\
 E[X(t)] &= E[A(t)]E[\cos(\omega_0 t + \Theta)] = 0 \\
 R_{X,X}(t_1, t_2) &= E[A(t_1)A(t_2)]E[\cos(\omega_0 t_1 + \Theta) \cos(\omega_0 t_2 + \Theta)] \\
 &= \frac{1}{2}R_{A,A}(t_2 - t_1) \{E[\cos(\omega_0(t_2 - t_1))] + E[\cos(\omega_0(t_1 + t_2) + 2\Theta)]\} \\
 &= \frac{1}{2}R_{A,A}(t_2 - t_1) \cos(\omega_0(t_2 - t_1)).
 \end{aligned}$$

Similarly,

$$\begin{aligned}
 E[Y(t)] &= 0 \\
 R_{Y,Y}(t_1, t_2) &= \frac{1}{2}R_{A,A}(t_2 - t_1) \cos((\omega_0 + \omega_1)(t_2 - t_1)).
 \end{aligned}$$

Hence, both  $X(t)$  and  $Y(t)$  are WSS. If  $Z(t) = X(t) + Y(t)$ ,

$$\begin{aligned}
 E[z(t)] &= E[X(t)] + E[Y(t)] = 0, \\
 R_{Z,Z}(t_1, t_2) &= R_{X,X}(t_1, t_2) + R_{Y,Y}(t_1, t_2) + R_{X,Y}(t_1, t_2) + R_{Y,X}(t_1, t_2), \\
 R_{X,Y}(t_1, t_2) &= E[A(t_1)A(t_2)]E[\cos(\omega_0 t_1 + \Theta) \cos((\omega_0 + \omega_1)t_2 + \Theta)], \\
 &= \frac{1}{2}R_{A,A}(t_2 - t_1) \cos(\omega_0(t_2 - t_1) + \omega_1 t_2), \\
 R_{Y,X}(t_1, t_2) &= R_{A,A}(t_2 - t_1) \cos(\omega_0(t_1 - t_2) + \omega_1 t_1).
 \end{aligned}$$

Since  $R_{Z,Z}(t_1, t_2)$  is not a function of  $t_1 - t_2$ ,  $Z(t)$  is not WSS.

### Problem 8.12

(a) Since  $T$  is uniformly distributed over one period of  $s(t)$ , for any time instant  $t$ ,  $X(t) = s(t - T)$  will be equally likely to take on any of the values in one period of  $s(t)$ . Given the linear functional form of  $s(t)$ ,  $X(t)$  will be uniform over  $(-1, 1)$ .

$$f_X(x; t) = \begin{cases} \frac{1}{2} & -1 \leq x \leq 1, \\ 0 & \text{otherwise.} \end{cases}$$

- (b)  $E[X(t)] = 0$  since the PDF above is symmetric about zero.  
(c)

$$\begin{aligned}
R_{X,X}(t_1, t_2) &= E[s(t_1 - T)s(t_2 - T)] \\
&= \int_0^1 s(t_1 - u)s(t_2 - u)du \\
&= \int_0^1 s(v)s(v + t_2 - t_1)dv \\
&= s(t) * s(-t) \Big|_{t=t_2-t_1} .
\end{aligned}$$

This is the time correlation of a triangle wave with itself which will result in the periodic signal shown in Figure 2.

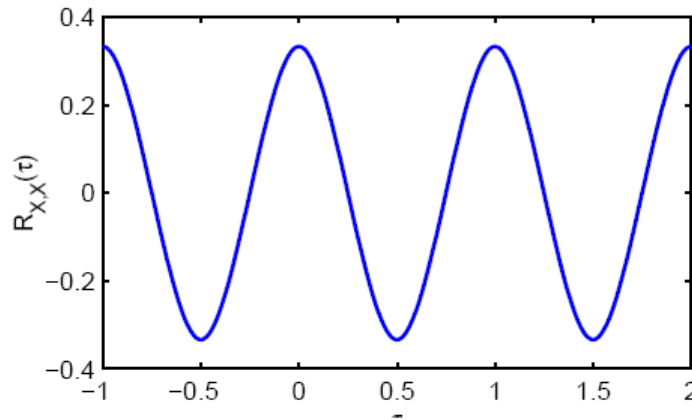


Figure 2: Autocorrelation function for process of Exercise 8.12

- (d) The process is WSS.

### Problem 8.19

Since

$$\lim_{k \rightarrow \infty} R_{X,X}[k] = \mu_X = 0,$$

the process is ergodic in the mean.

### Problem 8.25

Using probability generating functions:

$$H_X(z) = E[z^{X(t)}] = E[z^{\sum_{i=1}^n X_i(t)}] = E\left[\prod_{i=1}^n z^{X_i(t)}\right] = \prod_{i=1}^n E[z^{X_i(t)}] = \prod_{i=1}^n H_{X_i}(z).$$

$$\Pr(X_i(t) = k) = \frac{(\lambda_i t)^k}{k!} e^{-\lambda_i t}.$$

$$H_{X_i}(z) = \sum_{k=0}^{\infty} \frac{(\lambda_i z t)^k}{k!} e^{-\lambda_i t} = e^{\lambda_i z t} e^{-\lambda_i t} = e^{\lambda_i t(z-1)}.$$

$$H_X(z) = \prod_{i=1}^n e^{\lambda_i t(z-1)} = \exp\left(\left(\sum_{i=1}^n \lambda_i\right) t(z-1)\right).$$

Define  $\lambda = \sum_{i=1}^n \lambda_i$ . Then  $H_X(z) = \exp(\lambda t(z-1))$  which is the probability generating function of a Poisson random variable. Therefore  $X(t)$  is a Poisson process with arrival rate  $\lambda = \sum_{i=1}^n \lambda_i$ .

### Problem 8.28

Expected number of strikes is  $st$ .

(a) In one minute,  $st = \frac{1}{3} \cdot 1 = \frac{1}{3}$ .

(b) In ten minutes,  $st = \frac{1}{3} \cdot 10 = \frac{10}{3}$ .

(c) Average time between strikes is  $\frac{1}{s} = 3$  minutes.