L14: Optimal linear filtering – Wiener filtering

Lennart Svensson

Department of Signals and Systems
Chalmers University of Technology

Reviewing L11-L13

What have we done so far?

- **Signal models** (L11-L12)
  - Nonparametric models: ACF and PSD.
  - Parametric models: AR, MA and ARMA.
- **Signal model estimation** (L13)
  - Nonparametric spectral estimation: the periodogram.
    Pros:
    - fast to compute
    - asymptotically unbiased.

    Cons:
    - limited resolution for finite N:
      $\rightsquigarrow$ the modified periodogram improves this
    - large variance for all N:
      $\rightsquigarrow$ Blackman-Tukey's method lowers variance.
  - Parametric spectral estimation: AR-estimation.
    1. Estimate $r_x[k]$ from data.
    2. Reformulate Yule-Walker to get $\hat{a} = R_x^{-1} r_x$.

Learning objectives

After today's lecture you should be able to

- explain what type of problems **Wiener-filters** can solve.
- derive the **Wiener-Hopf** (WH) equations.
- use the WH-equations to derive a **causal FIR Wiener** filter.
- use the WH-equations to derive a **non-causal IIR Wiener** filter.
- Compute the **mean squared error** (MSE) of a Wiener-filter.

Filtering, smoothing and prediction

- Let $s[n]$ and $w[n]$ be zero mean, wide sense stationary processes and

$$x[n] = s[n] + w[n].$$

Objective

- Select $H(z)$ to make $e[n]$ as "small" as possible

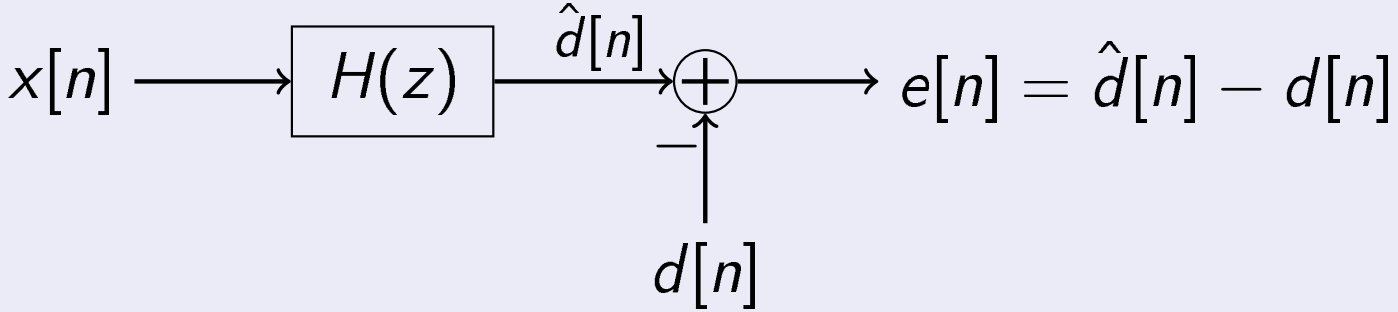

- Small could mean different things. We use mean squared error

$$E\left\{e[n]^2\right\},$$

since this is easy to minimize.

Filtering, smoothing and prediction

Based on measurements collected up until now, we encounter three common problems ($k > 0$):

- **Filtering** – estimating current signal values, $d[n] = s[n]$.
  Applications: positioning, control systems, noise or echo cancellation, etc.

- **Smoothing** – estimating past signal values, $d[n] = s[n-k]$.
  Applications: signal analysis, image processing, system identification (modelling).

- **Prediction** – estimating future signal values, $d[n] = s[n+k]$.
  Applications: decision making, planning, weather forecasts, etc.

Filtering, smoothing and prediction

These problems can be illustrated as

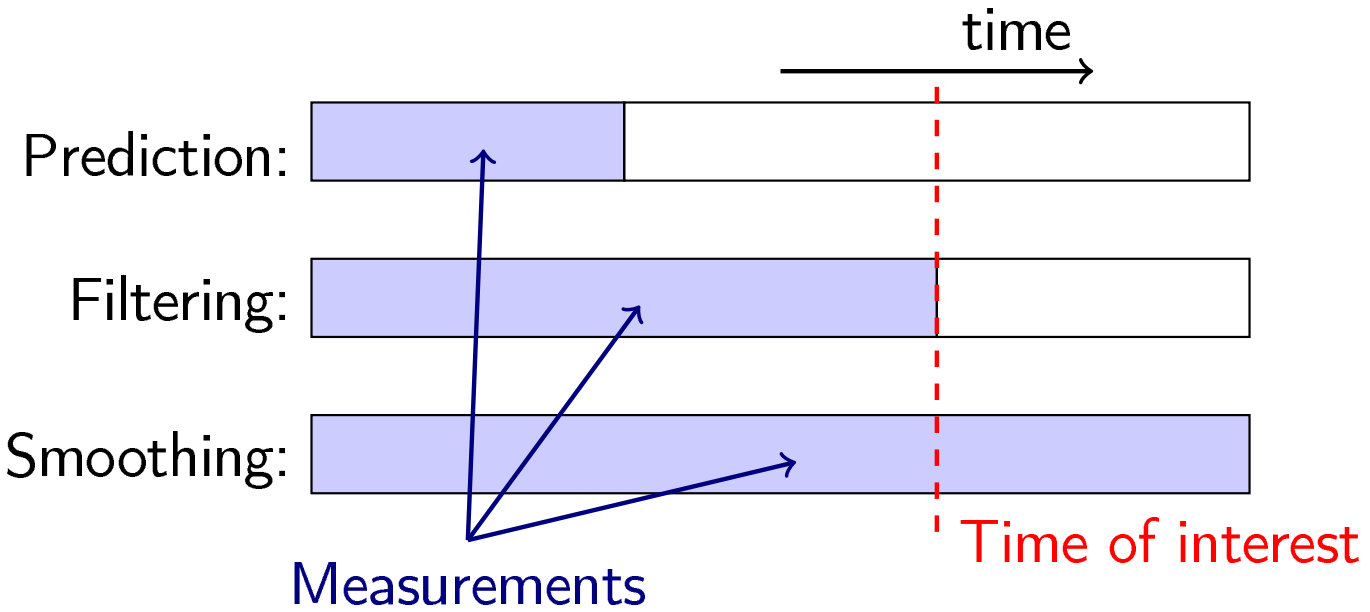

Filtering, smoothing and prediction

- We seek a linear estimator (filter)

$$\hat{d}[n] = h[n] \star x[n] = \sum_k h[k]x[n-k]$$

of $d[n]$.

- As mentioned above, we wish to minimize the mean square error (MSE),

$$\text{MSE}(\mathbf{h}) = E\left\{\left(d[n] - \sum_k h[k]x[n-k]\right)^2\right\}$$

where the vector $\mathbf{h}$ contains the impulse response coefficients $h[k]$.

- The resulting Wiener filter $\hat{d}[n]$ is a linear minimum mean square error (LMMSE) estimator.

Wiener-Hopf (W-H) equations

- The W-H equations are ***very important*** and can be used to solve all the problems mentioned above.
- **Objective**: (again) We wish to minimize

$$\text{MSE}(\mathbf{h}) = E\left\{\left(d[n] - \sum_k h[k]x[n-k]\right)^2\right\}$$

  with respect to $\mathbf{h}$.

- **Derivation 1:** the function is quadratic in $\mathbf{h}$
  $\Rightarrow$ it is convex in $\mathbf{h}$
  $\Rightarrow$ no local optima (except for the global optimum)
  $\Rightarrow$ sufficient to differentiate and set to zero!

Wiener-Hopf (W-H) equations

- Differentiate the MSE:

$$\frac{\partial}{\partial h[t]}\text{MSE}(\mathbf{h}) = \frac{\partial}{\partial h[t]} E\left\{\left(d[n] - \sum_k h[k]x[n-k]\right)^2\right\}$$
$$= E\left\{2\left(d[n] - \sum_k h[k]x[n-k]\right)(-x[n-t])\right\}$$
$$= -2r_{dx}[t] + 2\sum_k h[k]r_x[t-k]$$

- Setting this derivative to zero gives the

Wiener-Hopf (WH) equations

$$\sum_k h[k]r_x[t-k] = r_{dx}[t],$$

for all t where $h[t]$ is free to select.

FIR filters

- Suppose $H(z)$ is a causal FIR filter:

$$\hat{d}[n] = \sum_{n=0}^{p-1} h[k]x[n-k].$$

- The W-H eq's can be written as

$$\underbrace{\begin{bmatrix} r_x[0] & r_x[1] & \dots & r_x[p-1] \\ r_x[1] & r_x[0] & \dots & r_x[p-2] \\ \vdots & \vdots & \ddots & \vdots \\ r_x[p-1] & r_x|p-2] & \dots & r_x[0] \end{bmatrix}}_{\mathbf{R}_x} \underbrace{\begin{bmatrix} h[0] \\ h[1] \\ \vdots \\ h[p-1] \end{bmatrix}}_{\mathbf{h}} = \underbrace{\begin{bmatrix} r_{dx}[0] \\ r_{dx}[1] \\ \vdots \\ r_{dx}[p-1] \end{bmatrix}}_{\mathbf{r}_{dx}}$$

which yields that

$$\mathbf{h}_{\text{opt}} = \mathbf{R}_x^{-1}\mathbf{r}_{dx}.$$

What is the minimum MSE?

- The minimum MSE can be calculated by plugging in $\mathbf{h}_{\text{opt}}$:

$$E\left\{e_{\text{min}}^2[n]\right\} = E\left\{e_{\text{min}}[n]\left(d[n] - \hat{d}_{\text{opt}}[n]\right)\right\} = \left\{\text{Note: } \hat{d}_{\text{opt}} \perp e[n]\right\}$$

$$= E\left\{\left(d[n] - \sum_{k=0}^{p-1} h_{\text{opt}}[k]x[n-k]\right)d[n]\right\}$$

$$= r_d[0] - \sum_{k=0}^{p-1} h_{\text{opt}}[k]r_{dx}[k] = r_d[0] - \mathbf{r}_{dx}^T\mathbf{R}_x^{-1}\mathbf{r}_{dx}$$

- **Special case**: if $d[n]$ and $x[n]$ are uncorrelated, then $\hat{d}[n] = 0$ and the MSE is $r_d[0]$.
- In general, the more correlated (similar) $x[n]$ is to $d[n]$ the better is the estimate $\hat{d}[n]$!

Learning objectives

After today's lecture you should be able to

- explain what type of problems **Wiener-filters** can solve.
- derive the **Wiener-Hopf** (WH) equations.
- use the WH-equations to derive a **causal FIR Wiener** filter.
- use the WH-equations to derive a **non-causal IIR Wiener** filter.
- Compute the **mean square error** (MSE) of a Wiener-filter.