

CHALMERS



UNIVERSITY OF GOTHENBURG

*PREPRINT 2009:40*

# Crossings of Second-order Response Processes Subjected to LMA Loadings

THOMAS GALTIER  
SAYAN GUPTA  
IGOR RYCHLIK

*Department of Mathematical Sciences*

*Division of Mathematical Statistics*

CHALMERS UNIVERSITY OF TECHNOLOGY

UNIVERSITY OF GOTHENBURG

Göteborg Sweden 2009



Preprint 2009:40

**Crossings of Second-order Response Processes  
Subjected to LMA Loadings**

Thomas Galtier, Sayan Gupta, Igor Rychlik

Department of Mathematical Sciences  
Division of Mathematical Statistics  
Chalmers University of Technology and University of Gothenburg  
SE-412 96 Göteborg, Sweden  
Göteborg, October 2009

Preprint 2009:40  
ISSN 1652-9715

---

Matematiska vetenskaper  
Göteborg 2009

# Crossings of Second-order Response Processes Subjected to LMA Loadings

Thomas Galtier<sup>a</sup>, Sayan Gupta<sup>b,\*</sup>, Igor Rychlik<sup>a</sup>

<sup>a</sup>*Mathematical Sciences, Chalmers University of Technology,  
SE-412 96, Gothenburg, Sweden*

<sup>b</sup>*Department of Applied Mechanics, Indian Institute of Technology Madras,  
Chennai, 600 036, India.*

---

## Abstract

The focus of this paper is on the estimation of the crossing intensities of responses for second order dynamical systems, subjected to stationary, non-Gaussian external loadings. A new model for random loadings – the Laplace driven moving average (LMA) – is used. The model is non-Gaussian, strictly stationary, can model any spectrum and has additional flexibility to model the skewness and kurtosis of the marginal distribution. The system response can be expressed as a second-order combination of the LMA processes. A numerical technique for estimating the level crossing intensities for such processes is developed. The proposed method is a hybrid method which combines the saddle-point approximation with limited Monte Carlo simulations. The performance and the accuracy of the proposed method is illustrated through a set of numerical examples.

*Key words:* quadratic responses, Laplace distribution, moving average, Rice's formula, Gamma process, non-Gaussian process

---

20 October 2009

## 1 INTRODUCTION

Failures in randomly vibrating systems occur primarily in two different modes - gradual deterioration of the material properties resulting in fatigue type failure and/or due to overloading, when the structure response exceeds specified threshold levels for the first time. Quantification of the risk associated with a structural system requires probabilistic characterization of the structure response. The probability of first passage type of failures can be estimated from the statistics of the extreme structure response. On the other hand, predicting the risk against fatigue type of failures require the probability distribution of the amplitudes of the response cycles corresponding to various ranges. In either case, the corresponding statistic is related to the intensity of the up-crossing of levels. For smooth stationary processes, the up-crossing intensity,  $\mu(u)$ , of level  $u$ , is given by Rice's formula [1,2], expressed as

$$\mu(u) = \int_0^{\infty} z f_{Y(0),\dot{Y}(0)}(u, z) dz, \quad (1)$$

where,  $f_{Y(0),\dot{Y}(0)}(u, z)$  is the joint probability density function (j-pdf) of the response  $Y(0)$  and its instantaneous time derivative  $\dot{Y}(0)$ . The applicability of Eq. (1) lies in the availability of the information on the j-pdf  $f_{Y(0),\dot{Y}(0)}(u, z)$ . This is however rarely available.

Exact information about the j-pdf,  $f_{Y(0),\dot{Y}(0)}(u, z)$ , is available when the response is stationary and Gaussian. This is usually applicable when stationary

---

\* Corresponding author. *Email:* gupta.sayan@gmail.com *Phone:* +91 44 2257 4055.

*Fax:* +91 44 2257 4052.

*Email addresses:* thomas.galtier@gmail.com (Thomas Galtier),  
sayan@itm.ac.in (Sayan Gupta), rychlik@chalmers.se (Igor Rychlik).

Gaussian loads act on systems with very weak nonlinearities, enabling approximating such systems as time invariant linear systems. This simplification implies that the response is also stationary and Gaussian. The corresponding up-crossing intensity can thus be evaluated using Eq. (1), leading to

$$\mu(u) = f_z e^{-\frac{1}{2} \frac{(u - \mathbb{E}[Y(0)])^2}{\mathbb{V}(Y(0))}}, \quad (2)$$

where,  $f_z = \frac{1}{2\pi} \sqrt{\mathbb{V}(\dot{Y}(0))/\mathbb{V}(Y(0))}$  and  $\mathbb{V}(\cdot)$ ,  $\mathbb{E}[\cdot]$ , indicate the variance and the expected value, respectively.

The probability distribution of the extreme response in a fixed period  $T$ , viz.  $M_T = \max_{0 \leq t \leq T} Y(t)$ , can be conservatively estimated by means of the inequality

$$\mathbb{P}(M_T > u) \leq \mathbb{P}(Y(0) > u) + T \mu(u), \quad (3)$$

see e.g. [3]. (For stationary Gaussian responses the stronger result that  $\mathbb{P}(M_T > u)/(T\mu(u)) \rightarrow 1$  as  $u$  tends to infinity is true, see [4].) Hence, for a long time the study of random loads has been dominated by Gaussian processes, *i.e.*, the dynamics of the system were linearized while external loads were modeled by means of Gaussian processes.

However, there are situations where a simple linearization of weakly nonlinear, time invariant systems lead to approximations that are too crude. Such systems are often represented by means of Volterra functional expansion that is truncated after the second order term. More precisely, we assume that with input force  $X(t)$ , the response  $Y(t)$  can be written as a sum

$$Y(t) = Y_1(t) + Y_2(t), \quad (4)$$

where,

$$Y_1(t) = \int_{-\infty}^{\infty} h_1(s) X(t-s) ds \quad (5)$$

and

$$Y_2(t) = \frac{1}{2} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} h_2(s_1, s_2) X(t - s_1) X(t - s_2) ds_1 ds_2. \quad (6)$$

Here, it can be assumed that  $X(t)$  is a smooth Gaussian process, given by

$$X(t) = \int_{-\infty}^{\infty} f(t - x) dB(x), \quad (7)$$

where,  $B(x)$  is a Brownian motion while  $f(x)$  is a suitably chosen kernel. The pdf of responses and crossing properties of processes defined by Eq. (4), with Gaussian forcing, have been studied by many authors; see, for e.g., [5–8] and the more recent studies [9–13].

However, many real loads, e.g. ocean waves in shallow water or during heavy storms, show considerable non-Gaussian features, such as, a skewed marginal distribution with heavy tails. These waves are sometimes modeled by Volterra series expansions with Gaussian input, *i.e.*, a process of the same type as  $Y(t)$  in Eq. (4). Statistical analysis of extremes of  $Y(t)$  when the forcing is quadratic is a difficult task. One approach would be to employ Monte Carlo simulations. However, to estimate the crossing intensities of very high levels, which in turn imply rare events, would require large number of simulation runs making Monte Carlo simulations prohibitively expensive.

An alternative approach to modeling non-Gaussian forcing is to use a class of transformed Gaussian processes [14]. These processes take their starting point in a Gaussian process,  $Z(t)$ , and a continuous and increasing function  $g(\cdot)$ . Then one forms a non-Gaussian process,  $X(t)$ , according to the transformation  $X(t) = g(Z(t))$ . In this way, the process  $X(t)$  can have a non-Gaussian marginal distribution. Different strategies to choose the function  $g(\cdot)$  have been proposed and studied in [15–18]. The drawback of this class of models is the inability to exactly model the spectral density function.



In this paper, we consider another class of processes, the so called Laplace moving averages (LMA), to model the forcing. These models are characterized by mean, spectrum (as in the Gaussian case) and two more parameters for skewness and kurtosis of the marginal distribution [19]. In this way, LMA processes offer an alternative to the transformed Gaussian models that is preserving the correct spectrum. Both simulating from the model and passing through linear filters are straightforward as the linear filtering does not lead outside of this class. In this paper we shall study crossings of response  $Y(t)$ , as defined in Eq. (4), with  $X(t)$  assumed to be a LMA process.

The paper is organized as follows. First, in Section 2, we introduce the LMA process and review some simple properties of this model. In Section 3, we define the response process, Eq. (4), with LMA forcing and develop the necessary equations. In Section 4, we present a method based on the saddle-point approximation to compute the crossing intensity of  $Y(t)$ , given by  $\mu_Y(u)$ , when the joint moment generating function of the response and its instantaneous time derivative is available. Subsequently, some numerical examples are presented in Section 5 to highlight the applicability of the developments proposed in this paper and discussions on the accuracy of the estimates are presented. The salient features of the study carried out in this paper is highlighted in the concluding section.

## 2 THE LMA PROCESS

### 2.1 THE LAPLACE DRIVEN MOVING AVERAGE MODEL

The model we propose for loads is a continuous time moving average which may be written as

$$X(t) = \int_{-\infty}^{\infty} f(t-x) d\Lambda(x), \quad (8)$$

where,  $f(x)$  is a kernel function and  $\Lambda(x)$  is a stochastic process with independent and stationary increments having a generalized asymmetric Laplace distribution. The process  $\Lambda(x)$  is referred to as *Laplace motion* and the resulting process  $X(t)$  is called the *Laplace driven moving average* (LMA). Thus  $X(t)$  may be thought of as a convolution of  $f(\cdot)$  with the increments of the process  $\Lambda(x)$ . A process generated in this way is stationary and ergodic. In the special case where  $\Lambda(x)$  is chosen to be a Brownian motion, then  $X(t)$  becomes a Gaussian process; otherwise, in general it is non-Gaussian.

The generalized Laplace distribution is compactly defined by its characteristic function. More precisely, a random variable  $Z$  is said to have a generalized asymmetric Laplace distribution if its characteristic function is given by its characteristic function

$$\phi_Z(v) = \mathbb{E}[e^{ivZ}] = \frac{e^{iv\theta}}{(1 - i\mu v + \frac{\sigma^2 v^2}{2})^{\frac{1}{\nu}}}. \quad (9)$$

Here,  $\theta, \mu \in \mathbb{R}$  and  $\nu, \sigma > 0$  are parameters of the Laplace distribution and  $i = \sqrt{-1}$ . If  $\mu = 0$  the distribution is symmetric; otherwise it is asymmetric. An extensive overview of Laplace distributions is available in [20]. The generalized asymmetric Laplace distribution can be used to construct a process with independent and stationary increments – the previously mentioned

Laplace motion. The Laplace motion  $\Lambda(x)$  is a process that starts at zero and whose distribution at  $x$  is given by

$$\phi_{\Lambda(x)}(v) = \mathbb{E}[e^{iv\Lambda(x)}] = \frac{e^{iv\zeta x}}{(1 - i\mu v + \frac{\sigma^2 v^2}{2})^{\frac{x}{\nu}}}, \quad (10)$$

where,  $\zeta$  is a parameter representing the drift of the process. The Laplace motion can be extended to the whole real line by basically taking two independent copies of it and mirroring one of them in the origin. The extended process can then be used to define the moving average in Eq. (8). Since the increments of the Laplace motion are allowed to have an asymmetric distribution ( $\mu \neq 0$ ), it turns out that the corresponding moving average process will also have a non-symmetric marginal distribution. In fact, the marginal distribution of the Laplace driven MA has the following characteristic function

$$\phi_{X(t)}(v) = \exp\left(\int_{-\infty}^{\infty} i\zeta v f(x) - \frac{1}{\nu} \log\left(1 - i\mu v f(x) + \frac{\sigma^2 f^2(x)v^2}{2}\right) dx\right), \quad (11)$$

where  $\log(\cdot)$  is the complex logarithm function.

For the Laplace driven MA defined in Eq. (8), one can show that the mean and the two-sided spectral density  $S(\omega)$  are given by

$$\mathbb{E}[X(t)] = \left(\zeta + \frac{\mu}{\nu}\right) \int_{-\infty}^{\infty} f(x) dx, \quad S(\omega) = \frac{\sigma^2 + \mu^2}{\nu} \frac{1}{2\pi} |\mathcal{F}f(\omega)|^2. \quad (12)$$

Here,  $\mathcal{F}$  denotes the Fourier transform. This means that by choosing different kernels one can, in principle, model any spectrum. In the following, we shall assume that  $\int f(x)^2 dx = 1$  and hence

$$\mathbb{V}(X(t)) = \frac{\sigma^2 + \mu^2}{\nu}. \quad (13)$$

However, after having chosen the kernel  $f(\cdot)$  and fitting the mean and variance, there are still two free parameters, out of the four original ones. These “two degrees of freedom” can be used e.g. to fit skewness  $s$  and excess kurtosis  $\kappa$  (if

$\kappa > 3$ ) of the marginal distribution of  $Y(t)$ . By using the expression for the characteristic function in Eq. (11), these are given by

$$s = \mu\nu^{1/2} \frac{2\mu^2 + 3\sigma^2}{(\mu^2 + \sigma^2)^{3/2}} \int_{-\infty}^{\infty} f^3(x) dx, \quad (14)$$

$$\kappa = 3\nu \left( 2 - \frac{\sigma^4}{(\mu^2 + \sigma^2)^2} \right) \int_{-\infty}^{\infty} f^4(x) dx. \quad (15)$$

This ability to fit both spectrum and the marginal skewness and kurtosis can be very useful when modeling second order processes. Note that for a Gaussian process both skewness and excess kurtosis equal zero, *i.e.*,  $s = \kappa = 0$ . In fact, a Gaussian process can be obtained from the Laplace driven MA as a limiting case as  $s = 0$  and  $\kappa \rightarrow 0$ , e.g. by letting  $\mu = 0$  and  $\nu \rightarrow 0$  in such a way that  $V(X(0))$  in Eq. (13), is constant; see [20] (page 183) for more detailed discussion. Consequently, in the following, we consider Gaussian moving averages as a special case of Laplace moving averages.

## 2.2 SIMULATION OF THE LAPLACE DRIVEN MA

The Laplace driven moving average can be simulated in several different ways. The simplest and most straightforward one is to first simulate the increments of the Laplace motion over an equally spaced grid and then convolve it with the kernel  $f(\cdot)$ . In full generality, following [20], the asymmetric Laplace motion  $\Lambda(x)$ , with drift  $\zeta$ , can be represented as

$$\Lambda(x) = \zeta x + \mu\Gamma(x) + \sigma B(\Gamma(x)). \quad (16)$$

Here,  $\Gamma(x)$  is a gamma-process characterized by independent and homogeneous  $dx$ -increments having a gamma distribution with shape parameter  $dx/\nu$  and scale parameter 1 while  $B(x)$  is Brownian motion. Using this representation a

simple algorithm for simulating the Laplace driven moving average with kernel  $f(\cdot)$  is given by:

- (1) Pick  $m$ , and  $dx$  so that  $f(\cdot)$  is well approximated by its values on

$$-m dx < \dots < -dx < 0 < dx < \dots < m dx.$$

- (2) Pick  $n \gg 2m + 1$  so the  $k = n - 2m$  values of  $Y$  will be generated at  $0 < dx < 2 \cdot dx < \dots < (k - 1) \cdot dx$ .
- (3) Simulate  $n$  identical and independently distributed (i.i.d.)  $\Gamma(dx/\nu, 1)$  random variables and store them in a vector  $G = [G_j]$ .
- (4) Simulate  $n$  i.i.d. zero mean standard normal random variables and store them in a vector  $Z$ .
- (5) Compute  $X = \zeta \int f(x) dx + \mu f * G + \sigma f * (\sqrt{G} \cdot Z)$ , where  $\sqrt{G} \cdot Z = [\sqrt{G_j} \cdot Z_j]$ ,  $*$  denotes convolution and the integral  $\int f(x) dx$  is computed by some numerical method.

The advantage with the above simulation procedure is that it is very fast and efficient and that it works for long simulations and for most values of the parameters. The disadvantage is that one loses some resolution where the jumps in the Gamma process occur, due to taking an equally spaced grid.

### 3 QUADRATIC RESPONSE PROCESS WITH LMA FORCING

In this section, we employ a methodology developed in [5] to represent quadratic response processes with LMA forcing. The formulation closely follows the approach in [8], where asymptotical properties of the up-crossing intensity,  $\mu(u)$ , was studied for stationary process  $Y(t)$ , as defined in Eq. (4), when  $X(t)$  is a

stationary Gaussian process. Here, we consider the more general case where  $X(t)$  is modeled as a LMA process, see Eq. (8). Combining Eqs. (4) and (8), the response process  $Y(t) = Y_1(t) + Y_2(t)$ , can be rewritten as

$$Y_1(t) = \int_{-\infty}^{\infty} q(t-x) d\Lambda(x) \quad (17)$$

and

$$Y_2(t) = \frac{1}{2} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} Q(t-x_1, t-x_2) d\Lambda(x_1) d\Lambda(x_2). \quad (18)$$

Here,

$$q(t) = \int_{-\infty}^{\infty} h_1(s) f(t-s) ds, \quad (19)$$

and

$$Q(t, s) = \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} h_2(s_1, s_2) f(t-s_1) f(s-s_2) ds_1 ds_2. \quad (20)$$

For most real life engineering applications, the kernel  $Q(\cdot, \cdot)$  is symmetrical. Further, we assume that the kernels  $q(\cdot)$ ,  $Q(\cdot, \cdot)$  are square integrable and hence vanishes at infinity. Thus, by choosing  $T$  sufficiently large, we may approximate the kernels by letting  $Q(s, t) = 0$  and  $q(s) = 0$  for  $|s| > T$  and  $|t| > T$ . Under such assumptions, the Kac-Siebert technique based on the representation of the truncated kernel  $Q(\cdot, \cdot)$  through its eigenfunctions  $\phi_i(x)$  and eigenvalues  $\lambda_i$ , can be employed. Let the eigenfunctions and eigenvalues of the kernel  $Q(\cdot, \cdot)$  be defined by

$$\int_{-T}^T Q(t, s) \phi_i(s) ds = \lambda_i \phi_i(t). \quad (21)$$

For a symmetrical kernel  $Q(\cdot, \cdot)$ , the eigenfunctions corresponding to the different eigenvalues are orthogonal. By further normalization, we assume that  $\phi_i(\cdot)$  are orthonormal with eigenvalues  $\lambda_i$ . Suppose that the eigenfunctions are ordered according to  $|\lambda_i| \geq |\lambda_{i+1}|$ . Both eigenvalues and eigenfunctions

are real,  $\lambda_i \rightarrow 0$  as  $i \rightarrow \infty$ , and

$$\int_{-T}^T \int_{-T}^T \left| Q(s_1, s_2) - \sum_{i=1}^n \lambda_i \phi_i(s_1) \phi_i(s_2) \right|^2 ds_1 ds_2 \rightarrow 0 \text{ as } n \rightarrow \infty \quad (22)$$

see [21]. Further, for simplicity of presentation, we assume that

$$\int_{-T}^T \int_{-T}^T Q(s, t) q(s) q(t) dt ds < \infty, \quad (23)$$

and hence  $q(\cdot)$  can be expanded in a series using the orthonormal eigenfunctions  $\phi_i(\cdot)$ , viz.

$$q(s) = \sum_{i=1}^{\infty} a_i \phi_i(s), \quad a_i = \int_{-T}^T \phi_i(s) q(s) ds. \quad (24)$$

Then, in quadratic mean, the response in Eq. (4) can be rewritten as

$$Y(t) = \sum_{i=1}^{\infty} a_i W_i(t) + \frac{\lambda_i}{2} W_i^2(t), \quad (25)$$

where,

$$W_i(t) = \int_{-T}^T \phi_i(t-x) d\Lambda(x) \quad (26)$$

are LMA processes.

Often only a few of the eigenvalues  $\lambda_i$  are significantly nonzero. Assuming that the number of such eigenvalues is  $n-1$ , Eq. (25) can be rewritten as

$$Y(t) = \sum_{i=1}^{n-1} (a_i W_i(t) + \frac{\lambda_i}{2} W_i^2(t)) + \sum_{i=n}^{\infty} a_i W_i(t). \quad (27)$$

To formally consider the truncation of Eq. (27), we redefine the eigenfunctions for  $i \geq n$ , such that,

$$\phi_n(s) = \sum_{j=n}^{\infty} a_j \phi_j(s), \quad \phi_i(s) = 0, \quad \forall i > n. \quad (28)$$

Obviously  $a_n = 1$  while  $a_i = 0$  for  $i > n$ . We also define  $\lambda_i = 0$ , for all  $i \geq n$ .

Thus, the response  $Y(t)$  in Eq. (4) can be approximated by

$$Y(t) = \sum_{i=1}^n a_i W_i(t) + \frac{\lambda_i}{2} W_i^2(t) \quad (29)$$

and the instantaneous time derivative process by

$$\dot{Y}(t) = \sum_{i=1}^n a_i \dot{W}_i(t) + \lambda_i \dot{W}_i(t) W_i(t). \quad (30)$$

Note that Eqs. (29-30) are functions of the vectors of LMA processes  $\mathbf{W}(t) = \{W_i(t)\}_{i=1}^n$  and  $\dot{\mathbf{W}}(t) = \{\dot{W}_i(t)\}_{i=1}^n$ . A procedure for estimating the up-crossing intensity for  $Y(t)$  in Eq. (29) is discussed in the following section.

#### 4 ESTIMATION OF THE UP-CROSSING INTENSITY $\mu(u)$

The up-crossing intensity  $\mu(u)$  of  $Y(t)$  can be computed using Eq. (1) if the j-pdf of  $Y(0)$  and  $\dot{Y}(0)$  is available. This however is not easy when  $Y(t)$  is as defined in Eq. (29). The elements in vectors  $\mathbf{W}(t)$  and  $\dot{\mathbf{W}}(t)$  all have generalized Laplace distributions whose marginal pdfs are usually defined through their characteristic functions. Also, since the elemental processes  $W_i(t)$  and  $\dot{W}_i(t)$  have mutual dependence, the computation of the joint characteristic function of  $Y(0)$  and  $\dot{Y}(0)$  is a difficult task. In the special case when  $Y(t)$  is an LMA-process, *i.e.*,  $Y(t) = Y_1(t) = W_1(t)$ , (see Eq. (4) and when  $n = 1$  in Eq. (29)), it can be shown that the characteristic function can be expressed in an explicit manner; see later in Eq. (39). In addition, as the moment generated function exists, the saddle point method can be used for estimating the crossing intensity of the LMA-processes [22]. The details of the saddle point algorithm is available in the literature and for the sake of conciseness, is not repeated here; the reader is directed to references [9,10,13] for further details.



In this paper, we extend the above method and develop a similar procedure for estimating  $\mu(u)$  for the general quadratic response process,  $Y(t)$ , as defined in Eq. (4), but with LMA-forcing. It must be noted that for general quadratic processes,  $Y(t)$ , not only the characteristic functions are hard to compute but also the moment generating functions may not exist. Consequently, the application of the saddle point method, or even methods employing characteristic functions, are not straightforward. Obviously one could use Monte Carlo (MC) approaches to simulate  $Y(t)$  or to estimate the joint density of  $(Y(0), \dot{Y}(0))$  needed to compute  $\mu(u)$  using Eq. (1). However, the MC approach is not an efficient way for computing  $\mu(u)$  for high levels  $u$ , as the sample size, and in turn, the computational costs could be prohibitively large.

Here, an alternative “hybrid” method is presented. The proposed method is a combination of Monte Carlo simulations and the saddle point estimate. It uses the fact that conditionally on the Gamma process,  $\mathbf{W}(t)$  and  $\dot{\mathbf{W}}(t)$  are normally distributed. Consequently, the computation of conditional moment generating function is straightforward, and is given by

$$M(s, t|\gamma) = \mathbb{E} \left[ e^{sY(0)+t\dot{Y}(0)} | \Gamma(\cdot) = \gamma(\cdot) \right], \quad (31)$$

see Section 5.2. Now, the up-crossing intensity  $\mu(u)$  can be expressed as the expectation of  $N_Y(u)$ , *i.e.*, the number of up-crossings of level  $u$  by the process  $Y(t)$  in duration  $T = 1$ . Thus, one can find the conditional up-crossing intensity of the process  $Y(t)$  when conditioned on the Gamma processes and subsequently, the unconditional up-crossing intensity can be obtained as the first moment across the ensemble of Gamma processes. Mathematically, this can be written as

$$\mu(u) = E[N_Y(u)] = E [E [N_Y(u) | \Gamma(\cdot) = \gamma(\cdot)]] . \quad (32)$$

The up-crossing intensity  $\mu(u)$  can be estimated by computing the conditional moment generating function in Eq. (31) and using the saddle point method to estimate  $E [N_Y(u)|\Gamma(\cdot) = \gamma(\cdot)]$ . Subsequently, Monte Carlo simulations can be employed to estimate the unconditioned up-crossing intensity.

The saddle point algorithm is particularly efficient when the moment generating function,  $M(s, t)$ , is symmetrical in  $t$ , *i.e.*,  $M(s, t) = M(s, -t)$ . Note that the numerical algorithm presented in [9,10,13] is restricted to the symmetrical case. Unfortunately, the conditional moment generating function  $M(s, t|\gamma)$  in Eq. (31) is not, in general, symmetrical. For the asymmetrical  $M(s, t)$ , the algorithm is much slower and further development of the method is needed before one can use it for a complex problem. As will be demonstrated in the following subsection, one can bypass this problem for time reversible processes. The sufficient condition for the time reversibility of the response process is that the kernels  $q(t)$  and  $Q(s, t)$  in Eqs. (19-20) are symmetrical, which is what has been assumed in this paper.

#### 4.1 APPROXIMATION OF THE UP-CROSSING INTENSITY $\mu(u)$

Assuming that  $Y(t)$  is a time reversible process,  $Y(t)$  and  $Y(-t)$  have the same expected number of up-crossings of any level  $u$ . Consequently,

$$\tilde{Y}(t) = K \cdot Y(t) + (1 - K) \cdot Y(-t), \quad (33)$$

where,  $K$  is independent of the  $Y$ -process and takes values 0 or 1 with probability 1/2. Additionally,  $\tilde{Y}(t)$  has the same up-crossing intensity as the process  $Y(t)$ . In the special case when  $Y(t)$  is given by Eq. (4) with LMA-forcing, the up-crossing intensity can be expressed as

$$\mu(u) = E[N_Y(u)] = E[N_{\tilde{Y}}(u)] = E[E[N_{\tilde{Y}}(u)|\Gamma(\cdot) = \gamma(\cdot)]]. \quad (34)$$

Let the conditional crossing intensity be defined as

$$\mu(u|\gamma) = E[N_{\tilde{Y}}(u)|\Gamma(\cdot) = \gamma(\cdot)]. \quad (35)$$

Then, by simulating a sequence of Gamma processes,  $\gamma_i(\cdot)$ ,  $i = 1, \dots, N$ , the unconditional crossing intensity,  $\mu(u)$ , can be estimated by averaging  $\mu(u|\gamma_i)$ , viz.

$$\mu(u) \approx \frac{1}{N} \sum_{i=1}^N \mu(u|\gamma_i), \quad (36)$$

where,  $N$  is the number of sequence of Gamma process simulated.

The problem that needs to be addressed next is to develop a strategy for computing the conditional level crossing intensity  $\mu(u|\gamma_i)$ . Since the conditional moment generating function for  $\tilde{Y}(t)$  in Eq. (33), can be expressed as

$$M_{\tilde{Y}}(s, t|\Gamma(\cdot) = \gamma(\cdot)) = \frac{1}{2}M_Y(s, t|\gamma) + \frac{1}{2}M_Y(s, -t|\gamma), \quad (37)$$

it is obvious that  $M_{\tilde{Y}}(s, t|\Gamma(\cdot) = \gamma(\cdot))$  is symmetrical. This enables one to use the saddle point algorithms discussed in [9,10,13] to estimate the conditional up-crossing intensity  $\mu(u|\gamma_i)$ .

Clearly, the method to estimate the up-crossing intensity  $\mu(u)$  proposed here is a hybrid method which combines Monte Carlo simulations of realizations of Gamma processes and the saddle point approximation of up-crossing intensity. The advantage of this approach is that one can approximate crossings of extremely high levels (required when computing the extremes of responses with 100 years return period) which is otherwise difficult if one employs Monte Carlo simulations only. The unresolved issue of the accuracy of the proposed hybrid method will be examined in the following section.

## 5 COMPUTING THE UP-CROSSING INTENSITY AND DISCUSSIONS

First, we consider a LMA process, *i.e.*, when  $Y(t) = Y_1(t)$  for which the (unconditional) saddle point method can be used. For such cases, the saddle point method is very accurate, see [22], and the computed estimate can be used to benchmark the accuracy of the proposed method. This will allow us to study how large  $N$  in Eq. (36) should be in order to reach desired accuracy.

Next, we study the crossings of a simple quadratic response  $Y(t) = Y_1(t) + \lambda Y_1(t)^2/2$ . The up-crossing intensity can be computed when up-crossing intensity of the linear response  $Y_1(t)$  is known. Since the intensity can be very accurately computed by means of the saddle point method, one can now study the convergence of Eq. (36) with reference to the quadratic process.

Finally, we consider an example of  $Y(t)$  of full complexity and estimate the up-crossing intensity. Here, 12 eigenvalues  $\lambda_i$  differ significantly from zero. The computed crossing intensity is compared with the Monte Carlo estimate. The details of these numerical examples are elaborated in the following subsections.

### 5.1 SADDLE POINT APPROXIMATION OF CROSSINGS INTENSITY FOR LMA PROCESSES

We consider the crossings of a linear response process, given by

$$Y(t) = \int q(t-x) d\Lambda(x), \quad (38)$$

with symmetrical kernel  $q(\cdot)$ . The corresponding moment generated function is given by [19]

$$M(s, t) = \exp \left( \zeta \int_{-\infty}^{\infty} sq(x) + t\dot{q}(x) dx \right) \cdot \exp \left( -\frac{1}{\nu} \int_{-\infty}^{\infty} \log \left( 1 - \mu(sq(x) + t\dot{q}(x)) - \frac{\sigma^2}{2}(sq(x) + t\dot{q}(x))^2 \right) dx \right). \quad (39)$$

Since  $M(s, t) = M(s, -t)$ , one can use the efficient algorithm of the saddle point method discussed in [9,10,13].

In order to simplify the presentation we introduce the following notations;  $\mu_N^s(u)$  is the estimate of  $\mu(u) = \mathbf{E}[N(u)]$  computed by means of the hybrid saddle-point method and Eqs. (36-37) and  $\mu^s(u)$  denotes the estimate of  $\mathbf{E}[N(u)]$  by means of saddle-point method and  $M(s, t)$  defined in Eq. (39). Here  $N(u)$  is defined as the observed number of up-crossings of level  $u$  divided by the length of the ‘‘observation’’ time. In all the examples,  $N(u)$  has units Hz.

We first focus on the computation of the conditional moment generated function  $M(s, t|\gamma)$ . Let us consider two LMA processes defined by a common Laplace motion. More precisely, for two kernels  $f_1(\cdot), f_2(\cdot)$  and the Laplace motion  $\Lambda(x)$ , define

$$X_1(t) = \int f_1(t-x)d\Lambda(x), \quad X_2(t) = \int f_2(t-x)d\Lambda(x). \quad (40)$$

Here,  $\Lambda(x)$  is defined as in Eq.(16). Now, conditionally that  $\Gamma(\cdot) = \gamma(\cdot)$ , the Laplace motion can be written as

$$\lambda(x) = \zeta x + \mu\gamma(x) + \sigma B(\gamma(x)) \quad (41)$$

and hence the conditional LMA processes,  $X_1(t)$  and  $X_2(t)$ , can be represented

as

$$X_1(t) = \int f_1(t-x)d\lambda(x), \quad X_2(t) = \int f_2(t-x)d\lambda(x), \quad (42)$$

respectively. Obviously for any  $t$ , (here we take  $t = 0$ ), the joint pdf of  $X_1(0)$  and  $X_2(0)$ , is Gaussian with means and covariances  $m_i, \sigma_{ij}, i, j = 1, 2$ , given by

$$m_i = \zeta \int f_i(x)dx + \mu \int f_i(x)d\gamma(x), \quad \sigma_{ij} = \sigma^2 \int f_i(x)f_j(x)d\gamma(x). \quad (43)$$

Using Eq. (43), with  $f_1(x) = q(x)$  and  $f_2(x) = \dot{q}(x)$ , leads to

$$\begin{aligned} M(s, t|\gamma) &= \mathbb{E} \left[ e^{sY(0)+t\dot{Y}(0)} | \Gamma(\cdot) = \gamma(\cdot) \right] \\ &= \exp \left( s m_1 + t m_2 + 0.5s^2 \sigma_{11} + 0.5t^2 \sigma_{22} + s t \sigma_{12} \right). \end{aligned} \quad (44)$$

**Example 1:** In this example, 30 minutes of measured stress in a ship under stationary severe sea conditions is modeled as a LMA process. A part of the stress is shown in Figure 1(a). One can clearly see the existence of high frequency oscillations, likely due to whippings, which get superimposed with the wave induced stress. Figure 1(b) illustrates an estimated spectrum,  $S(\omega)$ , having two peaks. The kernel  $q(x)$  is computed from the spectrum  $S(\omega)$  and is illustrated in Figure 2(a). Note that the kernel is not uniquely defined by the spectrum; hence we impose the condition that the kernel is symmetrical.

We next need to identify the parameters of the LMA process. The variance of the stress time history is obtained by integrating the spectrum,  $S(\omega)$  with respect to  $\omega$ . Additionally, we assume that stress time history to be mean zero. In order to identify the remaining parameters of the LMA process, we compute the skewness and excess kurtosis which are 0.13 and 0.21 respectively. These values indicate that the stress process is slightly non-Gaussian.

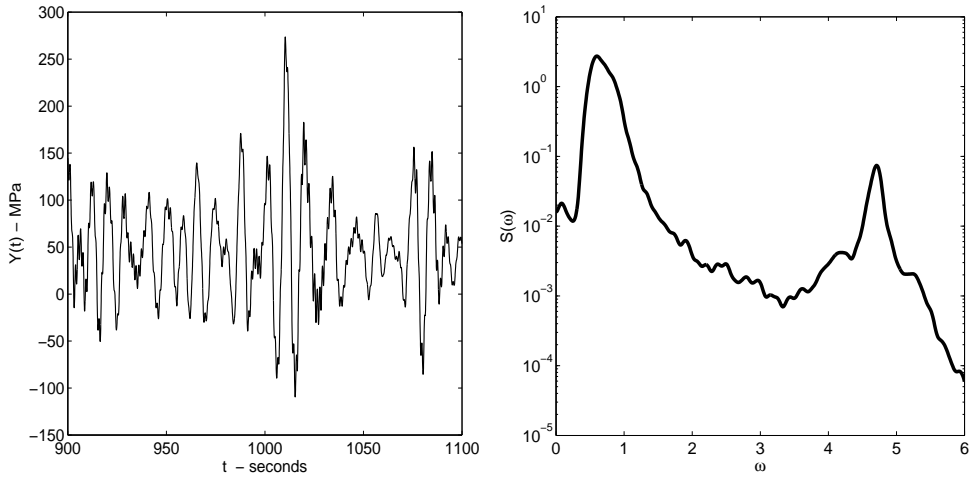


Fig. 1. Example 1: (a) A part of the measured stress. (b) An estimate of the spectral density for the measured stress.

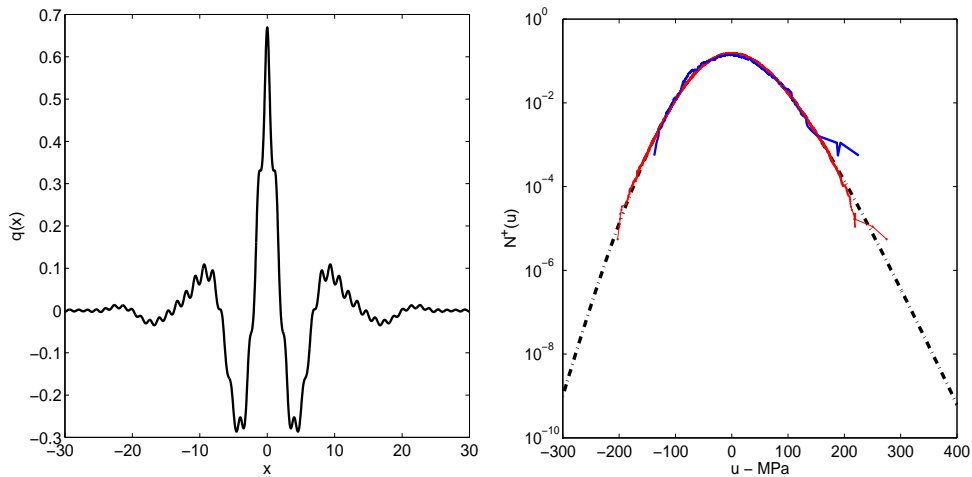


Fig. 2. Example 1: (a) Estimated kernel function  $q(x)$ . (b) Observed crossing intensity  $N(u)$  in the measured stress - solid line; simulated crossing intensity in 100 times longer signal than measured (50 hours) - solid line with dots; the saddle-point approximation  $\mu^s(u)$  of  $E[N(u)]$  - dashed dotted line

Figure 2(b) illustrates the crossing intensity  $N(u)$  for the measured stress (solid irregular line). In prediction of extremes, the crossings intensity needs to be extrapolated to much higher levels. Here, the LMA model is used for the extrapolation. The crossings of LMA are estimated by means of  $\mu^s(u)$ , *i.e.*, the saddle point method, where the moment generated function,  $M(s, t)$ ,

has been defined in Eq. (39). The function  $\mu^s(u)$  is shown in the plot as a dashed dotted line. The agreement between  $N(u)$  and  $\mu^s(u)$  is seen to be very good, except at the highest observed values of  $N(u)$ . These discrepancies can be attributed to extremely large whipping effects, which consists of several crossings of high levels. This effect is averaged in  $\mu^s(u)$ .

In order to verify this claim, we simulated the LMA process for a much longer duration (50 hour period) and computed the crossing intensities. The resulting crossing intensity,  $N(u)$ , is superimposed in Figure 2(b) by solid line with dots. We observe that the estimated crossing intensities follows closely those computed using the saddle point method. This confirms the accuracy of the saddle point method.

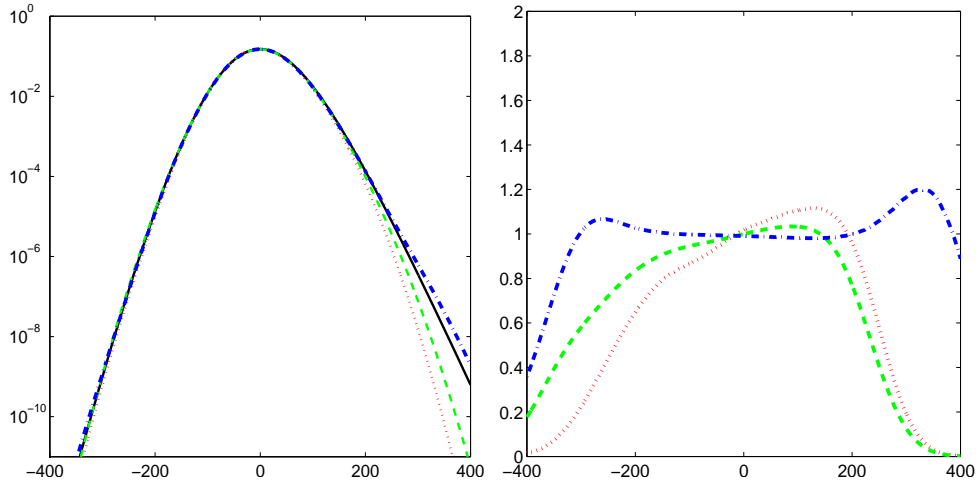


Fig. 3. Example 1: (a) Crossing intensities  $\mu_N^s(s, t)$  computed using the proposed hybrid method: Sample size for simulated gamma processes  $\gamma_i$ ;  $N = 1e2$ : dotted line;  $N = 1e3$ : dashed dotted line;  $N = 1e4$ : dashed line; Crossing intensity  $\mu^s(u)$ : solid line. (b) Corresponding relative errors  $\mu_N^s(u)/\mu^s(u)$ .

The primary objectives of this example are:

- (a) to study the applicability of the approximation  $\mu_N^s(u)$  (computed by



means of the saddle-point method and formulas Eq. (37-36)) and to predict the return values, *i.e.*, levels  $u_T$  such that  $\mathbb{E}[N^+(u_T)] = 1/T$ , and (b) to examine how fast  $\mu_N^s(u)$  converges to  $\mathbb{E}[N^+(u_T)]$ , which here is estimated by  $\mu^s(u)$ .

These are slightly different problems since in (a), one is interested in the horizontal distance between  $\mu_N^s(u)$  and  $\mu^s(u)$ , when plotted against levels  $u$ , while in (b), one examines the vertical distance between the functions. The conclusions of these studies are illustrated by means of Figure 3(a)-3(b). In Figure 3(a), we observe that even for as low  $N = 1e2$ , one gets relatively small errors (about 10%) in predictions of  $u_T$ . However, the vertical convergence is slower and one needs about  $N = 1e4$  simulations of  $\gamma_i$  to get satisfactory distance between the two lines; see Figure 3(b), where the fractions  $\mu_N^s(u)/\mu_\infty^s(u)$  for  $N = 1e2, 1e3, 1e4$ , are presented. The algorithm is relatively fast and one can use high values of  $N$  to obtain satisfactory accuracy levels.

## 5.2 COMPUTATION OF $M(s, t)$ FOR THE QUADRATIC RESPONSE.

The general quadratic response is only notationally more complex and we will proceed in a similar way as for the LMA process discussed in Example 1. First, we need to find the conditional moment generating function

$$M(s, t|\gamma) = \mathbb{E} \left[ e^{sY(0)+t\dot{Y}(0)} | \Gamma(\cdot) = \gamma(\cdot) \right], \quad (45)$$

which can be written by an explicit formula, see Eq. (48) derived below. Then one can simulate a sequence of gamma processes,  $\gamma_i(\cdot)$ ,  $i = 1, \dots, N$ , and as before approximate  $M(s, t)$  by means of Eq. (37).

Let  $\Lambda$  be a diagonal matrix with the diagonal elements being denoted by  $\lambda_i$ ,

$i = 1, \dots, n$ , and the rest of the elements being zero. Using matrix notation, the response process can be written as

$$\begin{aligned} Y(t) &= \mathbf{a}\mathbf{W}(t)^T + \frac{1}{2}\mathbf{W}(t)\Lambda\mathbf{W}(t)^T \\ &= \sum_{j=1}^n a_j W_j(t) + \frac{1}{2} \sum_{j=1}^n \lambda_j W_j^2(t), \end{aligned} \quad (46)$$

where,  $\mathbf{a} = (a_1, \dots, a_n)$  ( $a_n = 1, \lambda_n = 0$ ). As discussed earlier, conditionally on  $\Gamma(\cdot) = \gamma(\cdot)$ , the vectors  $\mathbf{W} = \mathbf{W}(0)$  and  $\dot{\mathbf{W}} = \dot{\mathbf{W}}(0)$  are normally distributed with means  $\mathbf{m}, \dot{\mathbf{m}}$  and covariance matrices  $\Sigma_{11}, \Sigma_{12}$  and  $\Sigma_{22}$ , where, for  $1 \leq i, j \leq n$ ,

$$\begin{aligned} \sigma_{11}(i, j) &= \sigma^2 \int \phi_i(x)\phi_j(x)d\gamma(x), \\ \sigma_{12}(i, j) &= \sigma^2 \int \phi_i(x)\dot{\phi}_j(x)d\gamma(x), \\ \sigma_{22}(i, j) &= \sigma^2 \int \dot{\phi}_i(x)\dot{\phi}_j(x)d\gamma(x), \\ m(i) &= \zeta \int \phi_i(x)dx + \mu \int \phi_i(x)d\gamma(x), \\ \dot{m}(i) &= \zeta \int \dot{\phi}_i(x)dx + \mu \int \dot{\phi}_i(x)d\gamma(x). \end{aligned} \quad (47)$$

Once the matrices  $\Sigma_{ij}$  and vectors  $\mathbf{m}$  and  $\dot{\mathbf{m}}$  are computed, it is a straightforward task to compute  $M(s, t|\gamma)$ , see [9], which is given by

$$M(s, t|\gamma) = \frac{1}{\sqrt{\det(\Sigma)}} \exp \left( ms + \dot{m}t + \frac{1}{2}t^2 \tilde{\mathbf{m}}\mathbf{V}\tilde{\mathbf{m}} + \frac{1}{2}\mathbf{t}^T\Sigma^{-1}\mathbf{t} \right). \quad (48)$$

Here,

$$\begin{aligned} \Sigma &= \Sigma_{11}^{-1} - s\Lambda - t \left( \Lambda\Sigma_{21}\Sigma_{11}^{-1} + \Sigma_{11}^{-1}\Sigma_{12}\Lambda \right), \\ \mathbf{t} &= s\tilde{\mathbf{m}} + t\dot{\mathbf{m}}\Lambda + t\tilde{\mathbf{m}}\Sigma_{11}^{-1}\Sigma_{12} + t^2\tilde{\mathbf{m}}\mathbf{V}\Lambda, \quad \tilde{\mathbf{m}} = \mathbf{a} + \mathbf{m}\Lambda, \\ m &= \mathbf{a}\mathbf{m}^T + \frac{1}{2}\mathbf{m}\Lambda\mathbf{m}^T, \quad \dot{m} = \mathbf{a}\dot{\mathbf{m}}^T + \dot{\mathbf{m}}\Lambda\mathbf{m}^T. \end{aligned} \quad (49)$$

**Remark:** It can be shown that Example 1 is obtained as a special case when  $n = 1$ , with  $\phi_1(s) = q(s)$  and  $\lambda_i = 0$  while  $a_1 = 1$  in Eq. (46). Under these conditions, using simple algebraic manipulations, it can be shown that the conditional moment generated function is equal to the expression in Eq. (44).

**Example 2:** In this example, we focus on checking the accuracy of the estimates of the level crossing intensity,  $\mu_N^s(u)$ , using the proposed hybrid method, for quadratic response  $Y(t)$  in Eq. (46) for the special case when  $n = 2$  and  $\phi_n = 0$ , *i.e.*,

$$Y(t) = Y_1(t) + \lambda Y_1^2(t)/2 = \lambda (Y_1(t) + 1/\lambda)^2/2 - 1/(2\lambda). \quad (50)$$

Considering the case  $n = 2$  provides certain advantages which can be exploited to benchmark the accuracy of the estimates,  $\mu_N^s(u)$ , using the proposed method. Using Eqs. (33) and (50), it can be shown that the crossing intensity  $\mu_Y(u) = \mathbb{E}[N_Y(u)]$  can be expressed as

$$\mu_Y(u) = \mu_{Y_1} \left( -1/\lambda + \sqrt{2u/\lambda + 1/\lambda^2} \right) + \mu_{Y_1} \left( -1/\lambda - \sqrt{2u/\lambda + 1/\lambda^2} \right). \quad (51)$$

As can be seen from Eq. (51), the accuracy of the estimate  $\mu_Y(u)$  depends on the estimate of the crossing intensity  $\mu_{Y_1}$ . This however, poses no problem as this can be very accurately obtained using the direct saddle-point method. Thus, replacing  $\mu_{Y_1}$  in Eq. (51) by the saddle-point estimate,  $\mu_{Y_1}^s$ , the expression in Eq. (51) can be used to benchmark the accuracy of the level crossing estimate,  $\mu_N^s(u)$ , obtained using the proposed hybrid method.

As in Example 1,  $Y_1(t)$  is a stress time history of duration 30 minutes measured in a particular location of a ship impinged by ocean waves during the course of its journey; see Figure 1(a). We use the LMA process described in Example 1, to model  $Y_1(t)$ . For the quadratic response, we choose  $\lambda = 0.01$ .

This value is chosen so that that the contribution of linear and quadratic parts to  $Y_1$  are similar; note that standard deviation of  $Y_1(t)$  is about 47 MPa. An estimate of the crossing intensity  $\mu_Y(u)$  is obtained using Eq. (51) and is shown in Figure 4(a). The accuracy of the crossing intensities for the corresponding levels,  $\mu_N^s(u)$ , obtained using the proposed method are determined by comparing with these values.

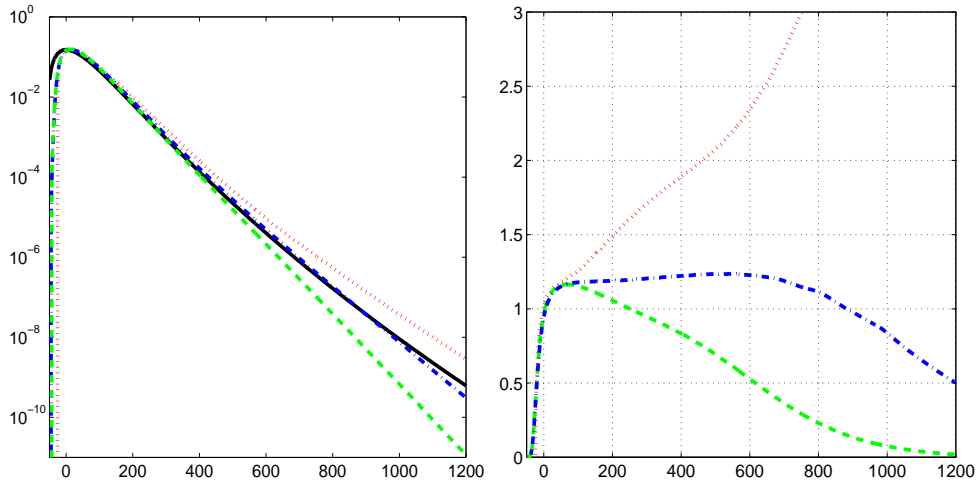


Fig. 4. Example 2: (a) Crossing intensities  $\mu_N^s(u)$  computed using the proposed hybrid method: Sample size for simulated gamma processes  $\gamma_i$ ;  $N = 1e2$ : dotted line;  $N = 1e3$ : dashed dotted line;  $N = 1e4$ : dashed line;  $\mu^s(u)$ : solid line. (b) Corresponding relative errors  $\mu_N^s(u)/\mu^s(u)$ .

In order to compute  $\mu_N^s(u)$ , one needs the expression for the conditional moment generating function  $M(s, t|\gamma)$ . This is given in Eqs. (48-49), with  $\Sigma_{11} = \sigma_{11}$ ,  $a = 1$ ,  $\Sigma_{22} = \sigma_{22}$ ,  $\Sigma_{12} = \sigma_{12}$ . All parameters have the same values as in Example 1. A comparison of the crossing intensity estimates,  $\mu_N^s$ , using the proposed hybrid method is illustrated in Figure 4(a). As in Example 1, we consider the three cases where  $N = 1e2$ ,  $1e3$  and  $1e4$ , where  $N$  is the number of gamma process simulations in the proposed hybrid method. A comparison of the relative errors is shown in Figure 4(b). As in Example 1, we observe

that the estimates are in fairly good agreement with the accuracy expectedly improving for larger values of  $N$ .

**Example 3:** In this example, we consider a more general quadratic response process, such that the number of terms  $n$  in Eq. (46) are more than one. We consider the response process  $Y(t) = Y_1(t) + Y_2(t)$  defined in Eqs. (17-18), where  $q(s) = \exp(-s^2/50)/\sqrt{25\pi}$ ,  $-25 \leq s \leq 25$ , and

$$Q(t, s) = 0.01 \exp(-(s - t)^2/50). \quad (52)$$

The parameters in Laplace motion,  $\Lambda(x)$ , is chosen in such a way that the linear response,  $Y_1(t) = \int_{-T}^T q(t - s) d\Lambda(s)$ , has mean zero, variance one, skewness 0.5 and kurtosis 4.5. For the kernel  $Q(t, s)$ , the first 12 eigenvalues were found to be significantly non-zero. To determine the number of such eigenvalues, the first 100 eigenvalues were found and ordered according to their absolute values, and their corresponding ratios with respect to their total summation were calculated. It was assumed that the series could be truncated when the sum of the absolute value of the eigenvalues exceeded 99.9% of the total sum. This led to  $n = 12$  for this example.

Based on experience from Examples 1 and 2, we expect that  $N = 1000$  simulations of  $\gamma_i$  are needed for arriving at a reasonably accurate estimate of  $\mu_N^s(u)$  using the proposed hybrid method. In the absence of any closed form analytical solutions for the crossing intensities of the quadratic response process, we compare the estimates obtained using the proposed hybrid method with those obtained from Monte Carlo simulations. For Monte Carlo simulations, simulating a large number of response processes and checking for their crossing intensities would be computationally very expensive and time consuming.

Instead, we adopt the following MC procedure:

- (a)  $1 \times 10^7$  independent samples of pairs  $(Y(0), \dot{Y}(0))$  were first simulated.
- (b) Subsequently, an approximation for the joint pdf  $f_{Y(0), \dot{Y}(0)}$  was statistically determined.
- (c) Finally, an estimate of the up-crossing intensity is obtained by numerically integrating Rice's formula in Eq. (1).

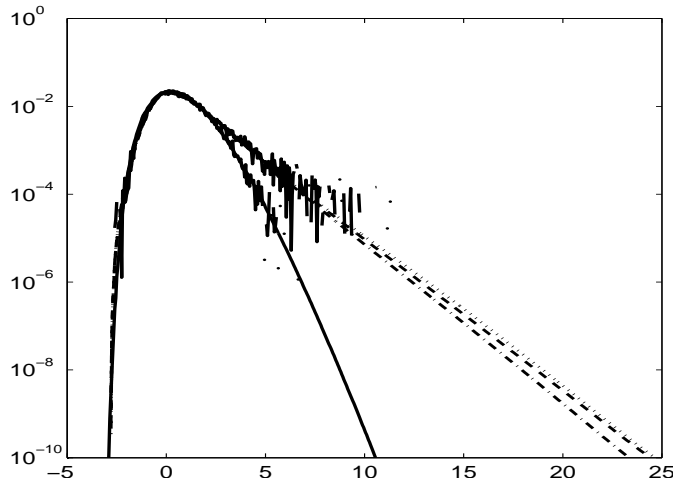


Fig. 5. Example 3: The dashed lines (3 in number) indicate the crossing intensities  $\mu_N^s(u)$  using the proposed hybrid method, with sample size for simulated gamma processes  $\gamma_i$  is  $N = 1000$ ; the corresponding irregular solid line is MC estimate; The thicker solid line is the saddle point estimate  $\mu^s(u)$  with Gaussian forcing; the corresponding irregular solid line is the corresponding MC estimate.

Figure 5 illustrates the comparison of the level crossing estimates obtained using the proposed hybrid method, when  $N = 1000$  and those obtained using Monte Carlo simulations. The three dashed lines are independent estimates of  $\mu_N^s(u)$ , and we observe that the variability between them is small, confirming the assumption that assuming  $N = 1000$  leads to estimates that are reasonably free from statistical fluctuations. The irregular solid line is obtained from Monte Carlo simulations and a fairly good agreement between the crossing

intensities is observed. Though the required computation time in the Monte Carlo method is of the same order as in the proposed hybrid method, it is clear from Figure 5 that the estimates from the proposed method are more accurate for higher levels.

We next focus on examining the errors induced in estimating up-crossing intensities for high levels when the non-Gaussian features of the response processes are neglected. Consequently, the up-crossing intensity of the response with Gaussian loading, viz.

$$Y_G(t) = \int_{-T}^T q(t-s) dB(s) + \int_{-T}^T \int_{-T}^T Q(t-s_1, t-s_2) dB(s_1) dB(s_2), \quad (53)$$

is also computed. Note that for the kernel  $q(\cdot)$ , the variance of the linear response remains unchanged, *i.e.*, is equal one, while skewness and kurtosis are respectively zero and 3. The corresponding crossing intensities are computed using the same algorithm as for the proposed hybrid method, but for  $N = 1$ , as the response process is unconditionally Gaussian and no simulation of gamma processes are required. The results are illustrated in the same plot; see Figure 5, as the thicker solid line. For completeness, the corresponding level crossing intensities were also computed using the Monte Carlo technique used in this example. These estimates are shown in Figure 5 as the irregular thick line. Based on these observations, one can conclude the following:

- (i) One can see the extremal responses for  $Y_G(t)$  are much smaller than the one under LMA forcing, even though in both cases mean and variance are equal. For example, if one assumed that the two forcing are stationary and last for 100 years, then the 100 years response, defined as the level crossing intensity approximately equal to  $3 \times 10^{-10}$  can be examined from Figure 5. We observe that while for the Gaussian forcing the level is approximately

10, the corresponding level for the skewed non-Gaussian loading is 23, a difference of more than 100%. It is quite obvious that neglecting the non-Gaussian features of the response leads to an underestimation of the level crossing intensities. This highlights the importance of modeling the non-Gaussian features of the response, especially in the context of risk analysis against high levels (rare events).

- (ii) The close agreement between the level crossing estimates for the response  $Y_G(t)$  using the saddle-point method (whose performance has already been examined in details in other studies) and the Monte Carlo simulation approach used in this example provide confidence on the accuracy of the level crossing estimates obtained using the proposed MC approach.

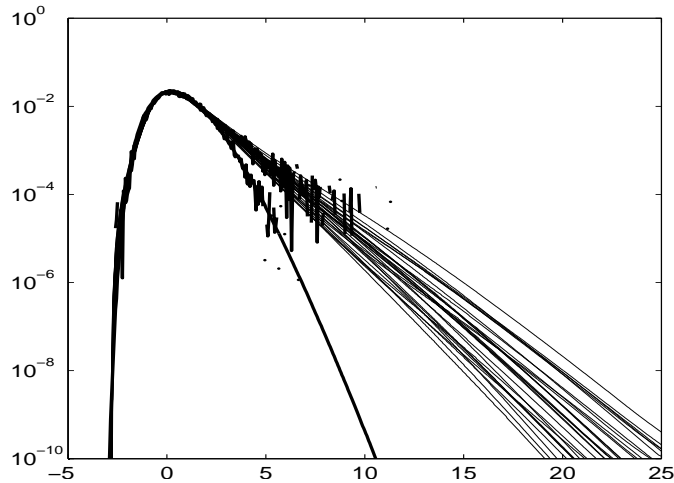


Fig. 6. Example 3: The thin solid lines (30 in number) are the crossing intensities  $\mu_N^s(u)$  using the proposed hybrid method, with sample size for simulated gamma processes  $\gamma_i$  is  $N = 100$ ; the corresponding irregular solid line is MC estimate; The thicker solid line is the saddle point estimate  $\mu^s(u)$  with Gaussian forcing; the corresponding irregular solid line is the corresponding MC estimate.

Finally, one may ask about the accuracy of the estimates,  $\mu_N^s(u)$ , computed for smaller number  $N$  of simulated  $\gamma_i$  processes. In order to answer this question, the crossing intensities were estimated using the proposed hybrid method with



$N = 100$  gamma process simulations. 30 independent estimates of  $\mu_N^s(u)$  were calculated and are represented as thin solid lines in Figure 6. From the figure, one can see that the variability of  $\mu_{100}^s(u)$  is quite large indicating that  $N = 100$  is probably too small a sample size for the statistical fluctuations to die down.

## 6 Concluding Remarks

The problem of estimating the crossing intensities of the response process of second order dynamical systems, subjected to non-Gaussian loadings has been studied. The loads are assumed to be strictly stationary and are modeled as LMA processes. This enables retaining the non-Gaussian features, such as skewness and kurtosis, of the marginal distributions. For second order dynamical systems, the response is expressed as a quadratic combination of the LMA processes and are non-Gaussian. Direct application of Rice's formula is not possible as the joint pdf of the response and its instantaneous time derivative is not available. A numerical method is developed so that approximations for the crossing intensities can be computed with fairly reasonable accuracy. Three numerical examples have been presented to illustrate the proposed method. The salient features emerging from this study are:

- (1) The proposed method is a hybrid method that combines the analytical saddle-point approximation and the Monte Carlo approach. Consequently, the proposed method is much faster than Monte Carlo simulations.
- (2) The accuracy levels of the proposed hybrid method depend on the number of samples of Gamma process simulations and is expectedly better for larger sample size. For the examples considered in this paper, a sample

size of 1000 is found to lead to estimates of fairly good accuracies.

- (3) Neglecting the non-Gaussian effects of the loading can severely underestimate the crossing intensities of the response, particularly for high levels. This, in turn, implies overestimating the safety and reliability of a system subjected to rare loadings, leading to unsafe designs.
- (4) The proposed method is applicable for systems with symmetric second order kernels. Fortunately, most physical second order dynamical systems ensure symmetric second order kernels. Therefore, this is not a severe restriction.

## Acknowledgement

The research presented in this paper has been partially supported by the Gothenburg Stochastic Center and the Swedish foundation for Strategic Research through GMMC, Gothenburg Mathematical Modelling Center. The authors also express their gratefulness to DNV, crew, management company and owner for providing measurement data.

## References

- [1] S. O. Rice, "The mathematical analysis of random noise," *Bell System Technical Journal*, vol. 23, pp. 282-232, 1944.
- [2] M. B. Marcus, "Level crossings of a stochastic process with absolutely continuous sample paths", *Annals of Probability*, vol. 5, pp. 52-71, 1977.
- [3] H. Cramèr, M. Leadbetter, *Stationary and Related Stochastic Processes: Sample Function Properties and Their Applications*, Wiley, 1967.

(Republication by Dover 2004.)

- [4] J.-M. Azais, M. Wschebor, *Level sets and extrema of random processes and fields*, Wiley, 2009.
- [5] M. Kac, A. J. F. Siegert, "On the theory of noise in radio receivers with square law detectors," *Journal of Applied Physics*, vol. 18, pp. 383-397, 1947.
- [6] N. Jonson, S. Kotz, *Continuous Univariate Distributions - 2*, John Wiley and Sons, New York, 1970.
- [7] S. O. Rice, "Distribution of quadratic forms in normal random variables - evaluation by numerical integration," *SIAM Journal of Scientific and Statistical Computing*, vol. 1, pp. 438-448, 1980.
- [8] A. Naess, "Statistical analysis of second-order responses of marine structures," *Journal of Ship Research*, vol. 29, pp. 270-284, 1985.
- [9] U. Machado, *Statistical analysis of non-gaussian environmental loads and responses*, Ph.D. Thesis, Lund University, Sweden, 2002.
- [10] O. Hagberg, *Asymptotic expansions of crossing rates of stationary random processes*, Ph.D. thesis, Lund University, Sweden, 2005.
- [11] A. Baxevani, O. Hagberg, I. Rychlik, "Note on the distribution of extreme waves crests," in *Proceedings of the 24th International Conference on Offshore Mechanics and Arctic Engineering*, 2005.
- [12] A. Naess, O. Gaidai, "The asymptotic behaviour of second-order stochastic volterra series models of slow drift response," *Probabilistic Engineering Mechanics*, vol. 22, pp. 343-352, 2007.
- [13] U. Machado, R. Butler, I. Rychlik, "Distribution of wave crests in non-Gaussian sea," *Applied Ocean Research*, vol. 31, pp. 57-64, 2009.

- [14] S. R. Winterstein, "Non-normal responses and fatigue damage," *Journal of Engineering Mechanics ASCE*, vol. 111, pp. 1291-1295, 1985.
- [15] S. R. Winterstein, O. B. Ness, "Hermite moment analysis of nonlinear random vibration," in: W. K. Liu, T. Belytschko (Eds.), *Computational Mechanics of Probabilistic and Reliability Analysis*, Ch. 21, pp. 452-478, Elme Press, 1989.
- [16] M. K. Ochi, K. Ahn, "Probability distribution applicable to non-Gaussian random processes," *Probabilistic Engineering Mechanics*, vol. 9, pp. 255-264, 1994.
- [17] I. Rychlik, P. Johannesson, M. R. Leadbetter, "Modelling and statistical analysis of ocean-wave data using transformed Gaussian processes," *Marine Structures*, vol. 10, pp. 13-47, 1997.
- [18] U. E. B. Machado, "Probability density functions for nonlinear random waves and responses," *Ocean Engineering*, vol. 30, pp. 1027-1050, 2003.
- [19] S. Aberg, K. Podgórski, I. Rychlik, "Fatigue damage assessment for a spectral model of non-gaussian random loads," *Probabilistic Engineering Mechanics*, vol. 24, pp. 608-617, 2009.
- [20] S. Kotz, T. J. Kozubowski, K. Podgórski, *The Laplace distribution and generalizations: A revisit with applications to communications, economics, engineering and finance*, Birkhäuser, Boston, 2001.
- [21] R. Courant, D. Hilbert, *Methods of mathematical Physics*, Interscience, New York, 1953.
- [22] T. Galtier, *Note on the estimation of crossing intensity for laplace moving average*, Technical Report, Chalmers University of Technology, Sweden, 2009.