

Lecture 11. 100 years events - extreme loads

Igor Rychlik

Chalmers

Department of Mathematical Sciences

Probability, Statistics and Risk, MVE300 • Chalmers • May 2014

100 years accident:

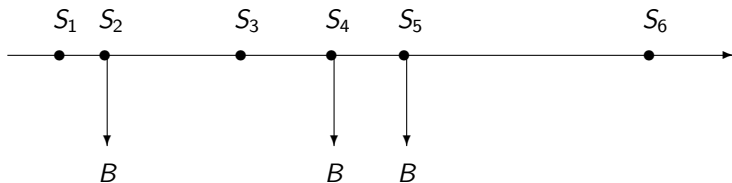


Figure : Probability that B , following A , occurs at least once during a year is approx. $\lambda_A P(B)$.

In lecture 10 we have used models to evaluate

$$P(B) = P(Z = g(X_1, X_2, \dots, X_n) > u^{crt})$$

Here statistical methods to find $P(B)$, i.e. a tail of Z distribution, will be discussed.

If $\lambda_A P(B) = \frac{1}{100}$, i.e. $P(B) = \frac{1}{\lambda_A 100}$ then u^{crt} is called 100-years level or B is 100 years event.

Why it is called 100 years accident?

- ▶ Expected number of A followed by B in 100 years is one.
($100 * \lambda_A P(B) = 100 \cdot \frac{1}{100}$).
- ▶ Probability that A followed by B occurs at list once in 100 years is
 $1 - \exp(-100\lambda_A P(B)) = 1 - \exp(-1) = 0.63$.



Examination 2010-05-25 Problem 4.

Example: Consider accidents in mines in UK. Find the 100 years accident.

- ▶ A - accident in a mine occurs; Z - number of perished in the accident; $B = "Z > u^{crt}"$.
- ▶ If $\lambda_A P(B) = 0.01$ then u^{crt} is the 100 years level.

Example contn.

Form occurrences of A Poisson point process? What is distribution of Z ?




Left figure: the empirical distribution for times between accidents is compared with exponential cdf $\exp(-x/a)$, $a^* = 0.316$ year. The intensity of A is $\lambda_A^* = 1/0.316 \text{ year}^{-1}$.

Right figure: observed values of Z - the number of perished in the accidents plotted on Weibull probability paper. The fitted parameters are $a^* = 47.7$ and $c^* = 1.36$.

Estimate 100-years accident in English mines in XVIII ct.:

Find u^{crt} such that $\lambda_A P(B) = 1/100$ where $B = "Z > u^{crt}"$. **Solution on blackboard**





The model gives

$$u^{crt} = -47.1(-\ln(0.00316))^{1/1.36} = 170.6.$$

It is too small value!!! There were 7 accidents during 40 years exceeding 171 perished.

Note that probability of more than one 100 years events in 40 years period is $1 - \exp(-0.4) - 0.4 \exp(-0.4) = 0.06$.

Peaks over threshold - POT:



Now we will change the definition of initiation event A to major accident:


$A = \text{"accident in mines with more than 100 perished"}$

$\lambda_A^* = 13/40 \text{ years}^{-1}$. Exceedances over threshold $u = 100$, $H = Z - 100$

[14, 89, 42, 261, 78, 43, 107, 89, 168, 20, 64, 1, 78]

100-years accident, continuation:

Find u^{crt} such that $\lambda_A P(B) = 1/100$ where $B = "Z > u^{crt}"$. **Solution on blackboard** ¹



There were one accident in 40 years that could be called 100-years accident. The probability that 100-years accident can happen in 40 years is 0.33.

Probability of more than one is 0.06.

Is the exponential fit accidentally good?
The answer is no!

$$^1 \frac{13}{40} \exp(-(x_{100} - 100)/81.1) = 0.01,$$

$$x_{100}^* = 100 - \ln\left(\frac{0.4}{13}\right) * 81.1 = 282.3.$$

Tails of a distribution $F_X(x)$.

Some seconds of reflections are needed to see that

$$P(H > h) = P(X > u_0 + h | X > u_0), \quad \text{in our example } u_0 = 100.$$

Under suitable conditions on the random variable X , which are always satisfied in our examples, if the threshold u_0 is high, then the conditional probability




$$P(X > u_0 + h | X > u_0) \approx 1 - F(h; a, c)$$

where $F(h; a, c)$ is a Generalized Pareto distribution (GPD), given by

$$\text{GPD: } F(h; a, c) = \begin{cases} 1 - (1 - ch/a)^{1/c}, & \text{if } c \neq 0, \\ 1 - \exp(-h/a), & \text{if } c = 0, \end{cases} \quad (1)$$

for $0 < h < \infty$ if $c \leq 0$ and for $0 < h < a/c$ if $c > 0$.


In most cases, e.g. when X is normal, Weibul, exponential, log-normal, Gumbel, the tails are exponential. If $c > 0$ there is an upper bound to the tails, e.g. $c = 1$ gives uniform cdf. Generalized Pareto Distribution² with $c > 0$ is useful model when there are some physical bounds for X . When $c < 0$ then tails are heavy, i.e. can take very large values, see the following figure where we compare cdf of $c = 1, c = 0, c = -1$ and $a = 1$.



²Pareto originally used this distribution to describe the allocation of wealth among individuals since it seemed to show rather well the way that a larger portion of the wealth of any society is owned by a smaller percentage of the people in that society.

Limitations of standard POT method:

Often the stream of A is not stationary, e.g. storms are more severe in winter than in summer, even parameters in GPD can vary seasonally then more advance methods (based on non-homogeneous Poisson processes) are needed.



Time series of observations of H_s , 1st July 1993 – 1st July 2003.

The alternative approach is to call a storm the 100 years storm if its H_s exceed a critical level u^{crt} . The critical level satisfies

$$P(\text{Yearly maximum} > u^{crt}) = 1/100.$$

Asymptotic distribution of maximums:

$$P(\max(X_1, \dots, X_n) \leq x) = F_X(x)^n.$$

If there are parameters $a_n > 0$, b_n and non-degenerate probability distribution $G(x)$ such that

$$P\left(\frac{M_n - b_n}{a_n} \leq x\right) = \left[F(a_n x + b_n)\right]^n \rightarrow G(x)$$

then G is the Generalized Extreme Value distribution

$$\text{GEV: } G(x; a, b, c) = \begin{cases} \exp\left(-\left(1 - c(x - b)/a\right)_+^{1/c}\right), & \text{if } c \neq 0, \\ \exp\left(-\exp\left\{-\left(x - b\right)/a\right\}\right), & \text{if } c = 0. \end{cases}$$

3

³The expression $(1 - c(x - b)/a)_+$ means that $1 - c(x - b)/a \geq 0$ and hence, if $c < 0$, the formula is valid for $x > b + (a/c)$ and if $c > 0$, it is valid for $x < b + (a/c)$. The case $c = 0$ is interpreted as the limit when $c \rightarrow 0$ for both distributions.

Gumbel-exponential exceedances:

The extreme value cdf is often used to model variability of **demand - load** type quantities. Let X be such a variable. Then 100-years demand/load is the value x_{100} such that probability that maximum of X during one year exceeds x_{100} is $1/100$. (Example of X is yearly maximum of the daily rainfalls.) For variable loads GEV are usually good models for the yearly demand/load.

Many real-world maximum loads belong to the GEV cdf with $c = 0$, i.e. Gumbel cd. For instance, if daily loads are normal, log-normal, exponential, Weibull (and some other distributions having the so-called exponential tails) then the yearly (or monthly) maximum loads belong to the Gumbel class of distributions.

Maximum stability:

Recall that a Gumbel distributed r.v. X has the cdf

$$F(x) = \exp(-e^{-(x-b)/a}), \quad -\infty < x < \infty.$$

Now the maximum $M_n = \max_{1 \leq i \leq n} X_i$ has distribution

$$\begin{aligned} P(M_n \leq x) &= \left(\exp(-e^{-(x-b)/a}) \right)^n = \exp(-ne^{-(x-b)/a}) \\ &= \exp(-e^{-(x-b)/a + \ln n}) = \exp(-e^{-(x-b-a \ln n)/a}). \quad (2) \end{aligned}$$

Thus, the maximum of n independent Gumbel variables is also Gumbel with b changed to $b + a \ln n$.

Example: Assume that the maximum load on a construction during one year is given by a Gumbel distribution with expectation 1000 kg and standard deviation 200 kg. (Show that $a = 156$, $b = 910$.) Suppose the construction will be used for 10 years. Then the maximum load over the period is Gumbel too with mean $1000 + 156 \cdot \ln 10 = 1.4 \cdot 10^3$ kg and standard deviation 200 kg.

Gumbel or GEV?

Since for many standard models for variable daily loads the maximum load supposed to be Gumbel distributed it is a popular model. Having data one can check whether the more general GEV model explains better the variability of maximums than Gumbel model does.

One can use the deviance:



$$\text{DEV} = 2(l(a^*, b^*, c^*) - l(\tilde{a}^*, \tilde{b}^*)),$$

where $l(a^*, b^*, c^*)$ is the log-likelihood function and a^*, b^*, c^* are ML estimates of parameters in a GEV cdf, while $l(\tilde{a}^*, \tilde{b}^*)$ is the log-likelihood function and \tilde{a}^*, \tilde{b}^* are ML estimates of parameters in a Gumbel cdf. If the deviance $\text{DEV} > \chi_{\alpha}^2(1)$ then the Gumbel model should be rejected.

Analysis of buoy data

Let study wave data from 1993-2003 given in (left panel). Let extract yearly maxima (marked as circles in left panel). Assume that those are iid.

We choose to model the yearly maxima using a Gumbel distribution. Since only 12 yearly maxima are available it is hard to make a proper validation of the model and we only present the values on a Gumbel probability plot (right panel).



The ML estimates of the parameters are $a^* = 1.5$ and $b^* = 10.0$, which gives the estimate of the 100-year significant wave height

$$x_{100}^* = b^* - a^* \ln(1/100) = 16.9 \text{ [m]}.$$

Next the standard deviation of the estimation error

$$\sigma_{\mathcal{E}}^* = 1.5 \sqrt{\frac{1.11 + 0.52 \ln(100) + 0.61(\ln(100))^2}{12}} = 1.756$$

and hence, with approximately 95% confidence, x_{100} is bounded by $16.9 + 1.64 \cdot 1.756 = 19.8$ m.

Rain data at Maiquetia international airport, Venezuela



The maximal daily rainfall during the years 1951, ..., 1998 was recorded.

Let choose the GEV class of distributions to model the data. ML estimates are found as $a^* = 19.9$, $b^* = 49.2$ and $c^* = -0.16$ and the standard deviation $D[C^*] \approx 0.14$.

With approximately 95% confidence, c lies in

$$[-0.16 - 1.96 \cdot 0.14, -0.16 + 1.96 \cdot 0.14] = [-0.43, 0.11].$$

We conclude that c^* does not significantly differ from zero⁴.



⁴DEV=1.67 is smaller than $\chi_{0.05}^2(1) = 3.84$ which confirms our conclusions that three-parameter GEV-distribution does not explain the variability of data significantly better than the Gumbel distribution does.

Rain data at Maiquetia international airport, Venezuela

Suppose that one wishes to design a system that takes care of the large amounts of rain water in the tropical climate. Recommendations indicates the safety index $\beta_{HL} = 3.7$ which corresponds to a risk for failure during one year to be 1 per 10 000. Hence one wishes to estimate x_{10000} .

For a Gumbel cdf with parameters $a^* = 21.5$ and $b^* = 50.9$ the design criterion is that the system should manage $x_{10000}^* = 249$ mm rain fall during one day.

Using formulas shown above we find that, with approximately 95% confidence, $x_{10000} \leq 249 + 1.64 \cdot 23.6 = 295$ mm.⁵

In 1999 a catastrophe happened with an accumulated rain during one day of 410 mm, causing around 50 000 deaths. The conclusion was that “the impossible had happened”.

⁵The confidence level is achieved under the assumption that the Gumbel distribution is the correct model for maximal daily rain during one year.

The model error

Before the 1999 maximum was observed, there were no indications that the Gumbel model was not correct and a natural question is why not always use the GEV model to describe the variability of yearly maxima, instead of assuming that $c = 0$?⁶.

In the case studied here, including one more parameter c to the model would not explain better the variability of data but made the design value more uncertain causing additional costs to meet the required safety level.

Let compute x_{10000}^* using the GEV model estimated for the data from the years 1951-1998, i.e. $a^* = 19.9$, $b^* = 49.2$ and $c^* = -0.16$. The design load $x_{10000}^* = 468$ mm and, with approximately 95% confidence, it is smaller than 1030 mm.

Clearly, using the design load 468 mm, one could be better prepared for the catastrophe that occurred 1999.

⁶Often in statistical practice, it is not recommended to use more complicated models than needed to describe data adequately