

# PDE Project Course

## *2. Implementation of adaptive finite element methods*

Anders Logg

`logg@math.chalmers.se`

Department of Computational Mathematics

# Lecture plan

- Matrix notation
- Assembling the matrices
- Mapping from a reference element
- Solving nonlinear problems
- Time-stepping

Warning:  $\xi$  is used with two different meanings!

# Matrix notation

# The stiffness matrix $S$

The *stiffness matrix*  $S$  is given by

$$S_{ij} = \int_{\Omega} \epsilon(x) \nabla \varphi_j(x) \cdot \nabla \hat{\varphi}_i(x) \, dx.$$

In one dimension, with  $\Omega = (a, b)$ , we have

$$S_{ij} = \int_a^b \epsilon(x) \varphi_j'(x) \hat{\varphi}_i'(x) \, dx.$$

# The load vector $b$

The *load vector*  $b$  is given by

$$b_i = \int_{\Omega} f(x) \hat{\varphi}_i(x) \, dx.$$

# Example: Poisson's equation

For Poisson's equation,  $-\nabla \cdot (\epsilon(x) \nabla u(x)) = f(x)$  in  $\Omega$ , we obtain

$$S\xi = b,$$

where  $S$  is the stiffness matrix,  $b$  is the load vector and  $\xi$  is the vector containing the degrees of freedom for the finite element solution  $U$  given by

$$U(x) = \sum_{j=1}^N \xi_j \varphi_j(x).$$

# The mass matrix $M$

The *mass matrix*  $M$  is given by

$$M_{ij} = \int_{\Omega} \varphi_j(x) \hat{\varphi}_i(x) \, dx.$$

# The convection matrix $B$

The *convection matrix*  $B$  is given by

$$B_{ij} = \int_{\Omega} \beta(x) \cdot \nabla \varphi_j(x) \hat{\varphi}_i(x) \, dx.$$

In one dimension, with  $\Omega = (a, b)$ , we have

$$B_{ij} = \int_a^b \beta(x) \varphi_j'(x) \hat{\varphi}_i(x) \, dx.$$

# Example: convection–diffusion

Using matrix notation, the convection-diffusion equation

$$\dot{u}(x, t) + \beta(x) \cdot \nabla u(x, t) - \nabla \cdot (\epsilon(x) \nabla u(x)) = f(x),$$

can be written in the form

$$M\dot{\xi}(t) + B\xi(t) + S\xi(t) = b.$$

This is an ODE for the degrees of freedom  $\xi(t)$ .

# General bilinear form $a(\cdot, \cdot)$

In general the matrix  $A_h$ , representing a bilinear form

$$a(u, v) = (A(u), v),$$

is given by

$$(A_h)_{ij} = a(\varphi_j, \hat{\varphi}_i).$$

# Assembling the matrices

# Computing $(A_h)_{ij}$

Note that

$$\begin{aligned}(A_h)_{ij} &= a(\varphi_j, \hat{\varphi}_i) = \int_{\Omega} A(\varphi_j) \hat{\varphi}_i \, dx \\ &= \sum_{K \in \mathcal{T}} \int_K A(\varphi_j) \hat{\varphi}_i \, dx = \sum_{K \in \mathcal{T}} a(\varphi_j, \hat{\varphi}_i)_K.\end{aligned}$$

Iterate over all elements  $K$  and for each element  $K$  compute the contributions to all  $(A_h)_{ij}$ , for which  $\varphi_j$  and  $\hat{\varphi}_i$  are supported within  $K$ .

# Assembling $A_h$

for all elements  $K \in \mathcal{T}$

for all test functions  $\hat{\varphi}_i$  on  $K$

for all trial functions  $\varphi_j$  on  $K$

1. Compute  $I = a(\varphi_j, \hat{\varphi}_i)_K$

2. Add  $I$  to  $(A_h)_{ij}$

end

end

end

# Assembling $b$

for all elements  $K \in \mathcal{T}$

for all test functions  $\hat{\varphi}_i$  on  $K$

1. Compute  $I = (f, \hat{\varphi}_i)_K$

2. Add  $I$  to  $b_i$

end

end



# Mapping from a reference element

# Some basic calculus


Let  $v = v(x)$  be a function defined on a domain  $\Omega$  and let

$$F : \Omega_0 \rightarrow \Omega$$

be a (differentiable) mapping from a domain  $\Omega_0$  to  $\Omega$ . We then have  $x = F(\xi)$  and

$$\begin{aligned} \int_{\Omega} v(x) \, dx &= \int_{\Omega_0} v(F(\xi)) \, |\det \partial F_i / \partial \xi_j| \, d\xi \\ &= \int_{\Omega_0} v(F(\xi)) \, |\det \partial x / \partial \xi| \, d\xi. \end{aligned}$$

# The mapping $F : K_0 \rightarrow K$

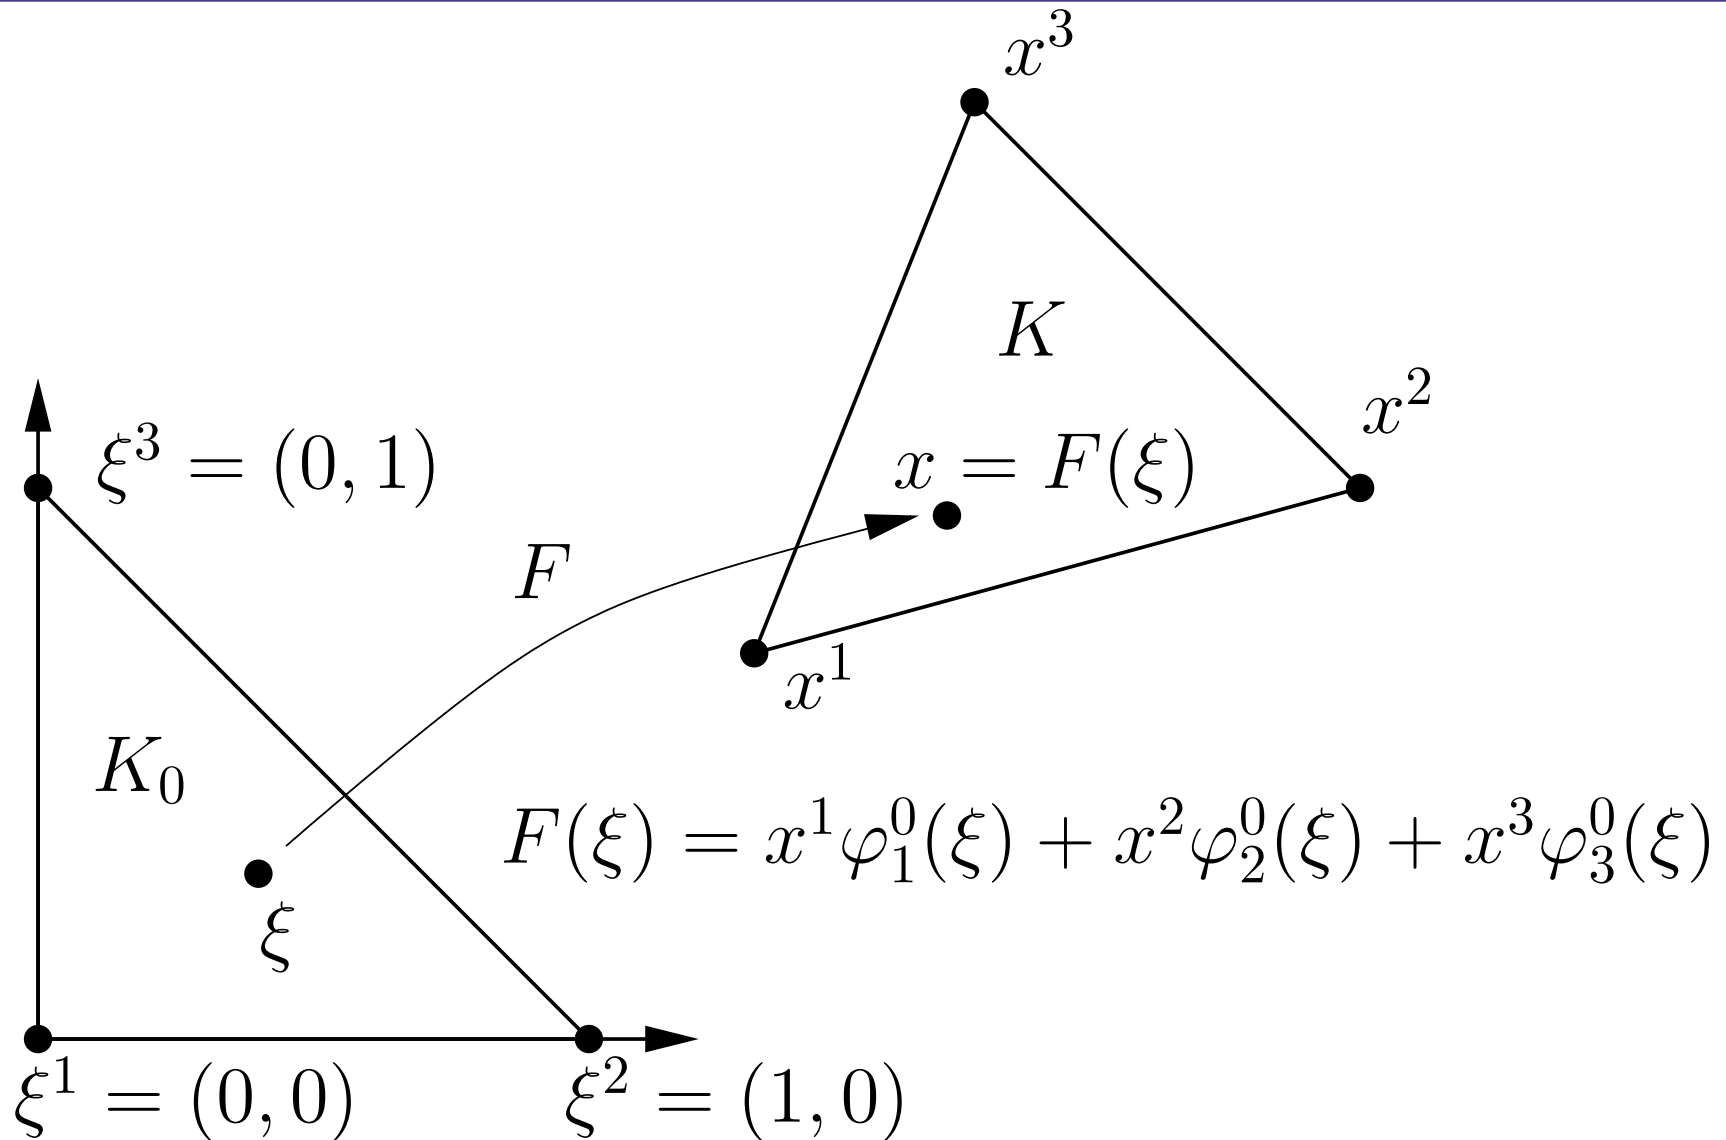

# Affine mapping

When the mapping is affine, the determinant is constant:

$$\begin{aligned} & \int_K \varphi_j(x) \hat{\varphi}_i(x) \, dx \\ &= \int_{K_0} \varphi_j(F(\xi)) \hat{\varphi}_i(F(\xi)) \, |\det \partial x / \partial \xi| \, d\xi \\ &= |\det \partial x / \partial \xi| \int_{K_0} \varphi_j^0(\xi) \hat{\varphi}_i^0(\xi) \, d\xi \end{aligned}$$

# Transformation of derivatives

To compute derivatives, we use the transformation

$$\nabla_{\xi} = \left( \frac{\partial x}{\partial \xi} \right)^{\top} \nabla_x,$$

or

$$\nabla_x = \left( \frac{\partial x}{\partial \xi} \right)^{-\top} \nabla_{\xi}.$$

# The stiffness matrix

For the computation of the stiffness matrix, this means that we have

$$\begin{aligned} & \int_K \epsilon(x) \nabla \varphi_j(x) \cdot \nabla \hat{\varphi}_i(x) \, dx \\ &= \int_{K_0} \epsilon_0(\xi) \left[ (\partial x / \partial \xi)^{-\top} \nabla_{\xi} \varphi_j^0(\xi) \right] \cdot \left[ (\partial x / \partial \xi)^{-\top} \nabla_{\xi} \hat{\varphi}_i^0(\xi) \right] \cdots \\ & \quad \cdots | \det (\partial x / \partial \xi) | \, d\xi. \end{aligned}$$

Note that we have used the short notation

$$\nabla = \nabla_x.$$

# Computing integrals on $K_0$

- The integrals on  $K_0$  can be computed exactly or by quadrature.
- In some cases quadrature is the only option.

Standard form:

$$\int_{K_0} v(\xi) d\xi \approx |K_0| \sum_{i=1}^n w_i v(\xi^i)$$

where  $\{w_i\}_{i=1}^n$  are quadrature weights and  $\{\xi^i\}_{i=1}^n$  are quadrature points in  $K_0$ .

# Solving nonlinear problems

# Nonlinear problems

If the problem is nonlinear, for example,

$$-\nabla \cdot (|\nabla u| \nabla u) = f,$$

we rewrite the problem as

$$-\nabla \cdot (|\nabla \tilde{u}| \nabla u) = f.$$

As before, we obtain a linear system  $A_h \xi = b$ , but now

$$A_h = A_h(\tilde{u}) = A_h(u) = A_h(\xi),$$

i.e.  $A_h(\xi)\xi = f$ .

# Fixed-point iteration

To solve a nonlinear problem  $F(\xi) = 0$ , we rewrite the problem in fixed-point form

$$\xi = g(\xi),$$

and apply fixed-point iteration as follows:

$$\xi^0 = \text{a clever guess}$$

$$\xi^1 = g(\xi^0)$$

$$\xi^2 = g(\xi^1)$$

...

# Fixed-point iteration

According to the contraction-mapping theorem, fixed-point iteration converges if

$$L_g < 1,$$

where  $L_g$  is a Lipschitz-constant of  $g$ :

$$\|g(\xi) - g(\eta)\| \leq L_g \|\xi - \eta\|.$$

# Basic algorithm

$$\xi = \xi^0$$

$$d = 2 \cdot \text{tol}$$

**while**  $d > \text{tol}$

$$\xi_{\text{new}} = g(\xi)$$

$$d = \|\xi_{\text{new}} - \xi\|$$

$$\xi = \xi_{\text{new}}$$

**end**

# Newton's method

Newton's method is a special type of fixed-point iteration for  $F(\xi) = 0$ , where we take

$$g(\xi) = \xi - (\partial F / \partial \xi)^{-1} F(\xi).$$

Usually converges faster than basic fixed-point iteration, but requires more work to implement.

# Time-stepping

# A shortcut

Replace  $\dot{\xi}$  by  $(\xi(t_n) - \xi(t_{n-1}))/k_n$ , and replace  $\xi$  by

- $\xi(t_{n-1})$ : forward / explicit Euler
- $\xi(t_n)$ : backward / implicit Euler
- $(\xi(t_{n-1}) + \xi(t_n))/2$ : Crank-Nicolson / cG(1)

# Example: backward Euler

Discretizing the heat equation  $\dot{u} - \Delta u = f$  in space, we have

$$M\dot{\xi} + S\xi = b.$$

Using the implicit Euler method for time-stepping, we obtain

$$M(\xi(t_n) - \xi(t_{n-1}))/k_n + S\xi(t_n) = b(t_n),$$

or

$$(M + k_n S)\xi(t_n) = M\xi(t_{n-1}) + k_n b(t_n).$$

# Basic algorithm

$$t_0 = 0$$

$$n = 1$$

while  $t < T$

$$t_n = t_{n-1} + k$$

$$\xi^n = \dots$$

$$n = n + 1$$

end